

ATS1481


ATS Reader Address Configuration Card for Smart Card Readers

Product Overview

The ATS1481 reader configuration card allow for an operator to specify the reader address of smart card readers without any programming device or menu configuration.

The reader address easily can be changed, by just badging at reader that needs to be changed.

Instructions are at the back of the card.

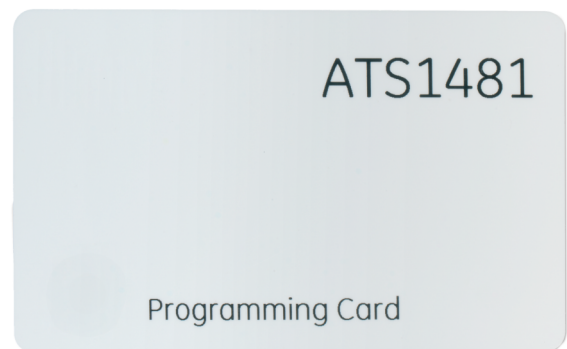

Details

- Instructions on flip side of the card

ATS1481

ATS Reader Address Configuration Card for Smart Card Readers

Technical specifications

System

Reading distance	0 to 30 cm
Custom data model	No
Supported readers	ATS Proximity Readers

Technology

Credential type	Configuration card, Proximity
Credential driftsfrekvens	125 KHz

Printing

Direct surface printing	Yes
-------------------------	-----

Ordering information

Minimum order quantity	1
Cards / tags in package	1

Physical

Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	86 x 54 mm
Colour	White
Card Label	Programming Card



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit za.firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:32