


2010-2-UC240-KIT

UC240 Kit (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable

Overview

UC240 UltraSync communicator is a dual path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on IP and SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

- Dual-path monitoring for low, medium and high risk sites, covering intruder applications, fire and more.
- These monitored alarm signalling devices are small enough to fit inside most alarm panels. They use two signalling paths – if the primary path is down, the secondary path kicks in. And if that happens, the secondary path will use the primary path reporting and polling times.
- The primary path uses IP technology to send alarm signals over the customer's network or broadband hub.
- The secondary path uses 4G or 2G mobile connectivity – with dual SIMs for extra resilience.
- EN50131 Grade 3 and EN50136 certified for intrusion systems.
- EN54-21 certified for fire alarm systems.

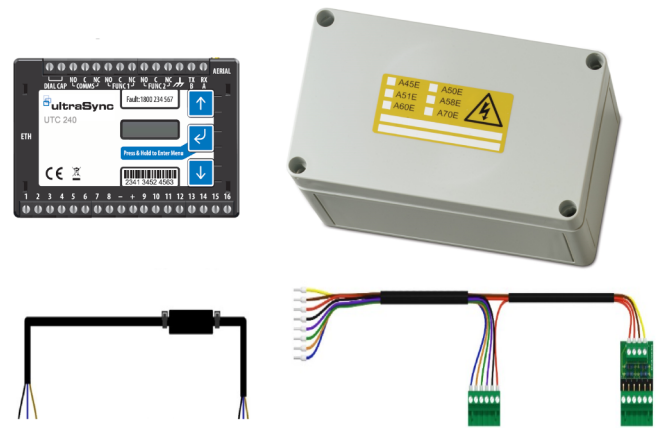

Alarm panel interfaces

- 16 general purpose alarm inputs (Logic High = +2 to +30 V / Logic Low = <1.3 V)
- 3 relay outputs
- Unconnected state: Logic Low
- Standard screw terminals
- Programmable function output-for remote control of site devices
- Line fault output-for status indication at site of alarm signalling path
- Dial Capture with phone line simulation
- Onboard RS232 or RS485 for direct panel interface to some panels

Dial Capture features

- Converts dialler alarm systems into high security signalling devices
- Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

Configuration

- Simple single push button pin learn
- iOS and Android installer app
- Using on board menu driven by push buttons

2010-2-UC240-KIT

UC240 Kit (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable

Technical specifications

General

Product line	UltraSync
--------------	-----------

Network

Communicator type	2G, 4G, Cellular, IP
GSM frequency	LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS Dual band (900/1800 MHz)

Reporting

Reporting protocols	Contact ID, SIA
Supported receivers	UltraSync

Interfaces

Ethernet	RJ-45 1000 Mbps Ethernet Interface
Antenna	Yes, included

Input / output

Inputs	16 general purpose alarm inputs
Outputs	3 relay outputs

Electrical

Operating voltage	9.5 to 30 VDC
Current consumption	85mA @12 VDC, 185mA @24 VDC (Maximum loading) 45mA @12 VDC, 100mA @24 VDC (Normal operation)

Physical

Physical dimensions	95 x 67 x 17 mm
Colour	Black

Environmental

Operating temperature	-10 to +55°C
Relative humidity	5 to 75%
Environment	EN50130-5 ; Class II - Indoor (general)

Regulatory

Certification	EN50131 Grade 3, EN50136, EN54-21
---------------	-----------------------------------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 9 December 2024 - 11:16