

# AD1000X10


## Plug-in module EV/VE/DD1000 (10-pack)

---

The AD1000 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the following detectors: EV1000 series / VE1000 series / DD1000 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD1000 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

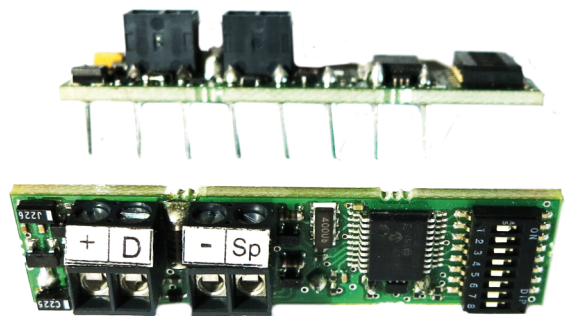

### Details

---

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

# AD1000X10

## Plug-in module EV/VE/DD1000 (10-pack)

### Technical specifications

---

#### General

Accessory group	Motion sensors
Type	Module
Device type / Category	T3 / PIR
Address range	0 to 31

#### Electrical

Operating voltage	9 to 24 VDC (12 V nominal)
Current consumption	200 mA (Max. current capacity output day/night) 200 mA (Max. current capacity output walk test) 900 $\mu$ A @ 13.4 VDC (Maximum) 400 $\mu$ A @ 13.4 VDC (Minimum) approx. 75 $\mu$ A (Out of bus)
IADS-bus voltage	12 or 24 VDC



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 11 April 2024 - 16:59