




ATS1500A-IP-KIT-06

Kit ATS1500A-IP-MM including ATS1135 keypad, VE1012 PIR motion detector, EMK46ATLSA magnetic contact, AS210N internal siren and BS127N battery

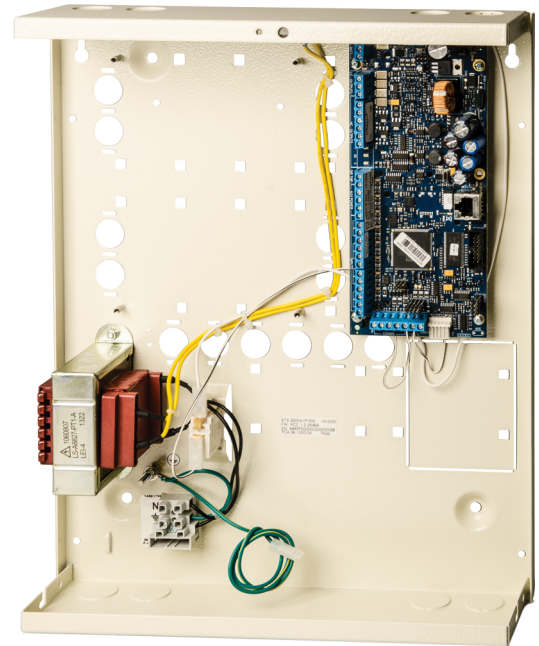

Details

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: language configurable per user
- Integrated 10/100Mb Ethernet connection
- IP alarm reporting to OH-NETREC receiver - Optional GPRS
- Integrated access control & support for ATS125x door controller

ATS1500A-IP-KIT-06

Kit ATS1500A-IP-MM including ATS1135 keypad, VE1012 PIR motion detector, EMK46ATLSA magnetic contact, AS210N internal siren and BS127N battery

Technical specifications

System

| | |
|-----------------------------|-------------------------------|
| Product line | Advisor Advanced |
| Product type | Integrated Access Control |
| Panel type | Hybrid |
| Kit | Yes |
| No. of keypads / readers | 8 |
| Data Gathering Panels (DGP) | 7 |
| No. of alarm groups | 16 |
| Specified cable | WCAT52 / WCAT54 or equivalent |

Inputs

| | |
|--------------------------|----|
| Max no. of inputs | 32 |
| Onboard inputs | 8 |
| Inputs plug-in expansion | 8 |

Outputs

| | |
|------------------------|-----|
| No. of outputs | 128 |
| No. of onboard outputs | 5 |

Area

| | |
|--------------|---|
| No. of areas | 4 |
|--------------|---|

User / cards

| | |
|-----------------------|----------------|
| Max. no. of users | more than 2000 |
| Users with name | 1000 |
| Max. no. of cards | 2000 to 65532 |
| Max. no. of PIN codes | 2000 to 65532 |

Access control

| | |
|----------------------------------|-----|
| Standard doors on control panel | 4 |
| Door groups | 128 |
| Floor groups | 128 |
| Intelligent doors on 4-door DGPs | 28 |

Communication

| | |
|---------------------------|----------------------------------|
| Onboard transmission type | IP |
| Transmission extension | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type | RS485 |

Event log

| | |
|------------------|-------|
| Alarm event log | 14500 |
| Access event log | 10000 |

Electrical

| | |
|-------------------------------|--|
| Power supply type | 230 VAC |
| Power supply value | 230 VAC +10%, -15%, 50 Hz |
| Mainboard current consumption | 150 mA |
| Max system current | 950 mA at 13.8 V \pm 0.2 V |
| Max aux power current | 750 mA (depends on backup power needs) |
| Auto-reset fuses | 5 |
| Glass break fuses | 1 (mains power) |

Physical

| | |
|---------------------|-------------------|
| Physical dimensions | 315 × 388 × 85 mm |
| Housing | Medium metal |

Environmental

| | |
|-----------------------|-------------------|
| Operating temperature | -10 to +55°C |
| Relative humidity | 95% noncondensing |
| Environmental Class | Class II, indoor |
| IP rating | IP30 |

Regulatory

| | |
|---------------|---------|
| EN50131 Grade | Grade 2 |
| Compliancy | CE |