


# ATS1500A-IP-MM-HKG16

**Kit ATS1500A-IP-MM including ATS1135 keypad, GSM/GPRS module and ATS1210E 8-16 zones DGP expander**

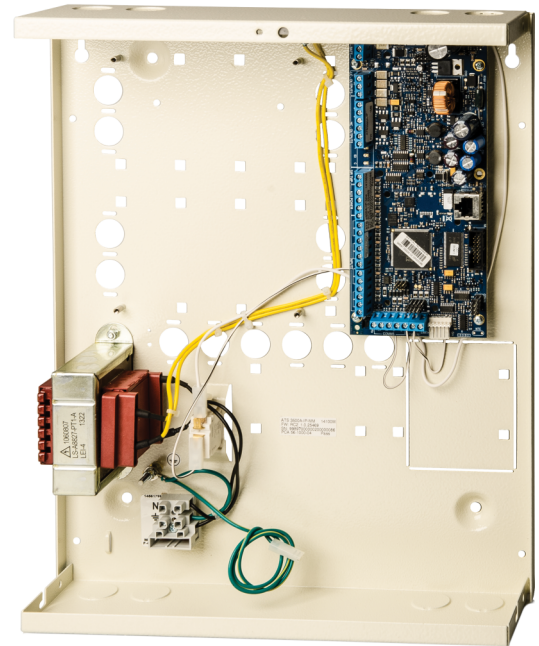

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 2000 users (max 65532 with Door/Lift Controllers)
- EN50131 Security grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual, own language for each user
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS/3G/4G
- Auto Arming - Schedules - Timed Outputs
- Standard access control without additional door controllers
- Full Access control using CDC4 Door & Lift controllers
- UltraSync support to quickly connect from anywhere
- Push messages to IOS/Android Mobile app (Supported by UltraSync)

# ATS1500A-IP-MM-HKG16

Kit ATS1500A-IP-MM including ATS1135 keypad, GSM/GPRS module and ATS1210E 8-16 zones DGP expander

## Technical specifications

### System

|                             |                               |
|-----------------------------|-------------------------------|
| Product line                | Advisor Advanced              |
| Product type                | Integrated Access Control     |
| Panel type                  | Hybrid                        |
| Kit                         | Yes                           |
| No. of keypads / readers    | 8                             |
| Data Gathering Panels (DGP) | 7                             |
| No. of alarm groups         | 16                            |
| Specified cable             | WCAT52 / WCAT54 or equivalent |

### Inputs

|                          |    |
|--------------------------|----|
| Max no. of inputs        | 32 |
| Onboard inputs           | 8  |
| Inputs plug-in expansion | 8  |

### Outputs

|                        |     |
|------------------------|-----|
| No. of outputs         | 128 |
| No. of onboard outputs | 5   |

### Area

|              |   |
|--------------|---|
| No. of areas | 4 |
|--------------|---|

### User / cards

|                       |                |
|-----------------------|----------------|
| Max. no. of users     | more than 2000 |
| Users with name       | 1000           |
| Max. no. of cards     | 2000 to 65532  |
| Max. no. of PIN codes | 2000 to 65532  |

### Access control

|                                  |     |
|----------------------------------|-----|
| Standard doors on control panel  | 4   |
| Door groups                      | 128 |
| Floor groups                     | 128 |
| Intelligent doors on 4-door DGPs | 28  |

### Communication

|                           |                                  |
|---------------------------|----------------------------------|
| Onboard transmission type | IP                               |
| Transmission extension    | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type              | RS485                            |

### Event log

|                  |       |
|------------------|-------|
| Alarm event log  | 14500 |
| Access event log | 10000 |

### Electrical

|                               |                                        |
|-------------------------------|----------------------------------------|
| Power supply type             | 230 VAC                                |
| Power supply value            | 230 VAC +10%, -15%, 50/60 Hz           |
| Mainboard current consumption | 150 mA                                 |
| Max system current            | 950 mA at 13.8 V $\pm$ 0.2 V           |
| Max aux power current         | 750 mA (depends on backup power needs) |
| Auto-reset fuses              | 5                                      |
| Glass break fuses             | 1 (mains power)                        |

### Physical

|                     |                   |
|---------------------|-------------------|
| Physical dimensions | 315 × 388 × 88 mm |
| Material            | Steel (painted)   |
| Housing             | Medium metal      |

### Environmental

|                       |                   |
|-----------------------|-------------------|
| Operating temperature | -10 to +55°C      |
| Relative humidity     | 95% noncondensing |
| Environmental Class   | Class II, indoor  |
| IP rating             | IP30              |

### Regulatory

|               |                          |
|---------------|--------------------------|
| EN50131 Grade | Grade 3, with tamper kit |
| Compliance    | CE                       |



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 16 June 2026 - 15:21