


# ATS1500A-MM-2RK

Kit ATS1500A-MM including 2x ATS1115A keypad

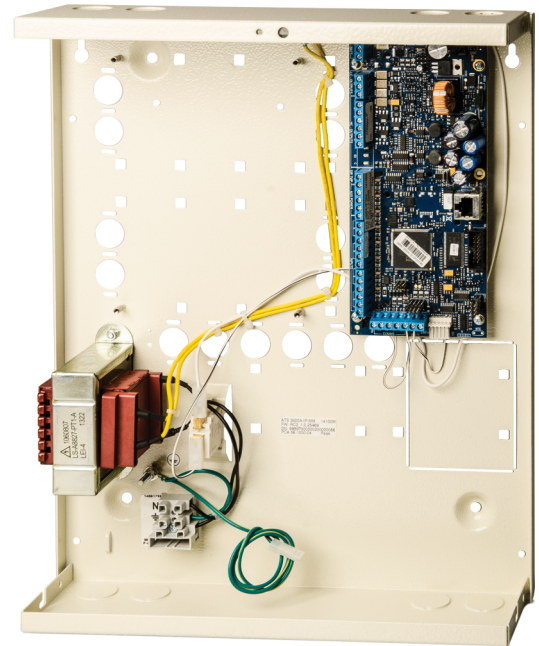

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 2000 users without access controller and up to 65532 with access controller
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- ATS7700 Plug-on PSTN dialler for reporting or configuration included
- Multilingual - own language for each user
- IP alarm reporting with optional TDA74x range IP / GPRS module
- Remote U/D over PSTN or optional IP / GPRS module
- Standard access control without additional door controllers
- Full access control using ATS125x or CDC4 door controllers
- Auto Arming - Schedules - Times Outputs

# ATS1500A-MM-2RK

## Kit ATS1500A-MM including 2x ATS1115A keypad

### Technical specifications

#### System

|                             |                               |
|-----------------------------|-------------------------------|
| Product line                | Advisor Advanced              |
| Product type                | Integrated Access Control     |
| Panel type                  | Hybrid                        |
| Kit                         | Yes                           |
| No. of keypads / readers    | 8                             |
| Data Gathering Panels (DGP) | 7                             |
| No. of alarm groups         | 16                            |
| Specified cable             | WCAT52 / WCAT54 or equivalent |

#### Inputs

|                          |    |
|--------------------------|----|
| Max no. of inputs        | 32 |
| Onboard inputs           | 8  |
| Inputs plug-in expansion | 8  |

#### Outputs

|                        |     |
|------------------------|-----|
| No. of outputs         | 128 |
| No. of onboard outputs | 5   |

#### Area

|              |   |
|--------------|---|
| No. of areas | 4 |
|--------------|---|

#### User / cards

|                       |                |
|-----------------------|----------------|
| Max. no. of users     | more than 2000 |
| Users with name       | 1000           |
| Max. no. of cards     | 2000 to 65532  |
| Max. no. of PIN codes | 2000 to 65532  |

#### Access control

|                                  |     |
|----------------------------------|-----|
| Standard doors on control panel  | 4   |
| Door groups                      | 128 |
| Floor groups                     | 128 |
| Intelligent doors on 4-door DGPs | 28  |

#### Communication

|                           |                            |
|---------------------------|----------------------------|
| Onboard transmission type | PSTN                       |
| Transmission extension    | GSM, GSM/GPRS, GSM/GPRS/IP |
| Databus type              | RS485                      |

#### Event log

|                  |       |
|------------------|-------|
| Alarm event log  | 14500 |
| Access event log | 10000 |

#### Electrical

|                               |  |
|-------------------------------|--|
| Power supply type             | 230 VAC                                |
| Power supply value            | 230 VAC +10%, -15%, 50 Hz              |
| Mainboard current consumption | 150 mA                                 |
| Max system current            | 1000 mA                                |
| Max aux power current         | 750 mA (depends on backup power needs) |
| Auto-reset fuses              | 5                                      |
| Glass break fuses             | 1 (mains power)                        |

#### Physical

|                     |                   |
|---------------------|-------------------|
| Physical dimensions | 315 × 388 × 85 mm |
| Material            | Steel (painted)   |
| Housing             | Medium metal      |

#### Environmental

|                       |                   |
|-----------------------|-------------------|
| Operating temperature | -10 to +55°C      |
| Relative humidity     | 95% noncondensing |
| Environmental Class   | Class II, indoor  |
| IP rating             | IP30              |

#### Regulatory

|               |         |
|---------------|---------|
| EN50131 Grade | Grade 2 |
| Compliance    | CE      |



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:36