


# ATS1500A-MM-HK

Kit ATS1500A-MM including ATS1135 keypad

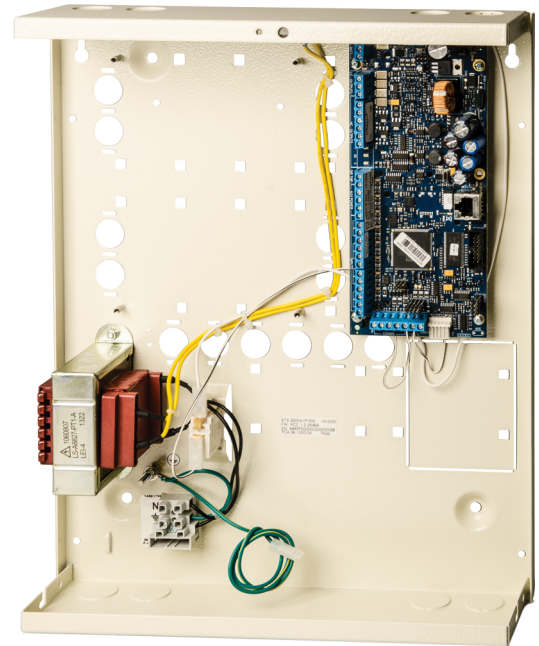

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 2000 users (max 65532 with Door/Lift Controllers)
- EN50131 Security grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration included
- Multilingual, own language for each user
- IP alarm reporting with optional TDA74xx-4 range IP / GPRS/3G/4G module
- Remote U/D over PSTN or optional TDA74xx-4 module
- Standard access control without additional door controllers
- Full Access control using CDC4 Door & Lift controllers
- Auto Arming - Schedules - Timed Outputs

# ATS1500A-MM-HK

## Kit ATS1500A-MM including ATS1135 keypad

### Technical specifications

---

#### System

Product line	Advisor Advanced
Product type	Integrated Access Control
Panel type	Hybrid
Kit	Yes
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54 or equivalent

#### Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

#### Outputs

No. of outputs	128
No. of onboard outputs	5

#### Area

No. of areas	4
--------------	---

#### User / cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

#### Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

#### Communication

Onboard transmission type	PSTN
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP
Databus type	RS485

#### Event log

Alarm event log	14500
Access event log	10000

#### Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50/60 Hz
Mainboard current consumption	150 mA
Max system current	1000 mA
Max aux power current	750 mA (depends on backup power needs)
Auto-reset fuses	5
Glass break fuses	1 (mains power)

#### Physical

Physical dimensions	315 × 388 × 85 mm
Material	Steel (painted)
Housing	Medium metal

#### Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP30

#### Regulatory

EN50131 Grade	Grade 3, with tamper kit
Compliancy	CE



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:36