

KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

General


The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it's a perfect match for exceptional overall performance.

The KE-DBA-RECW is an Excellence series, recess mount base accessory. It allows Excellence series detectors to be semi-recess mounted into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

Installation

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is automatically clamped between a retaining flange on the underside of the base moulding.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.

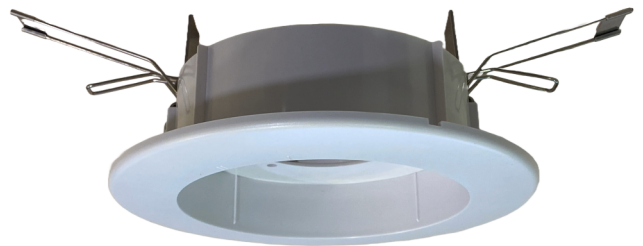

Details

- Easy to install with standard tile clips avoids any drilling
- Enhances the detector low profile for aesthetically sensitive installations
- Supports standard Excellence series bases without any feature loss
- Integrated trim skirt covers any uneven hole sides
- Dual address tag locations avoids base alignment to make tags visible

KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

Technical specifications

General

Compatibility	Excellence series bases
---------------	-------------------------

Physical

Physical dimensions	138 x 38 mm (Ø x H)
Net weight	110 g
Colour	Traffic white (RAL9016)
Mounting type	Ceiling mount, Recessed mount
Cable entries	1
Material (body)	Moulded ABS

Environmental

Vandal proof	No
Operating temperature	-10 to 75°C
Relative humidity	0 to 95% noncondensing
Environment	Indoor
IP rating	IP42

Regulatory

Compliance	CE, REACH, RoHS 3, WEEE
Certification	CE
Environmental	EN60529

Compatible products

Category	Reference	Description
Detection device	KE-DB3010W	Excellence series intelligent device accessory - standard base
Detection device	KE-DBA-TAGW	Intelligent addressable base accessory - address tag (white), supplied in packs of 10