

AACULP

Unidad de control para configurar cables sensor analógicos.

General

The AACULP is a PC programmable, Analogue Linear Heat Detection (LHD) cable control unit. It provides monitoring for any of the Alarmline II range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system.

Interface & Programming

The AACULP provides LED indications only and requires a PC to configure the control unit.

Pre-Alarm and Alarm thresholds can be set through simple menu options with no need for any graphs or nomograms. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable removing the need to know the sensor cable length.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality.

Operation

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged. It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. When the LHD sensor cable and the control unit are installed in different areas, a suitable interposing cable can be used to make the electrical connection between them.



Detalles

- UL521 and CE approval, UL/ULC listed
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP66 rated enclosure
- No nomograms or charts required

AACULP

Unidad de control para configurar cables sensor analógicos.

Especificaciones técnicas

Eléctrico

Voltaje de funcionamiento	20 to 28 VDC
Consumo de corriente	<70mA (Pre-alarm & alarm) <50mA (Pre-Alarm) <50mA (Alarm) <40mA (Fault) <40mA (Quiescent)

Detección

Longitud de la zona	30.5 m to 500 m (100 ft to 1640 ft)
---------------------	-------------------------------------

Físico

Dimensiones físicas	182 x 180 x 90 mm (W x H x D) 7 1/8" x 7 1/8" x 3 1/2" (W x H x D)
Peso neto	735 g
Color	Gris claro
Tipo de Montaje	Montaje empotrado
Material (body)	Polycarbonato

Medioambiental

Temperatura de funcionamiento	0 to +50°C
Humedad relativa	0 to 95% max. noncondensing 75% for <75 m cable & 54°C alarm setting
Entorno	Interior, Exterior
Clasificación IP	IP66 IK08

Regulador

Certificación	CE, UL
---------------	--------

Output


Pre-Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Fault (Opto-isolated phototransistor output) Max.	50 V @ 20 mA

Input

Remote reset (isolated)	20 to 28 VDC 5 s pulse
-------------------------	---------------------------

Detection

Ambient Temperature upAlarm Temperature - 54°C to 30°C
Ambient Temperature upAlarm Temperatures - 64°C / 72°C / 79°C to 47°C
Ambient Temperature upAlarm Temperatures - 86°C / 100°C to 69°C

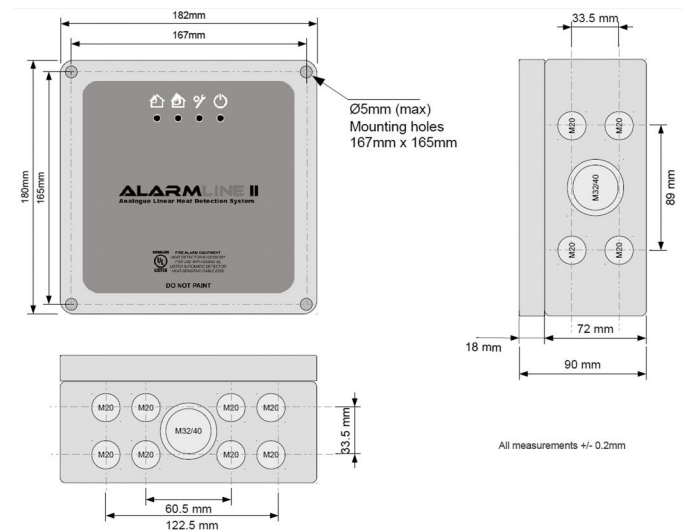

Como empresa innovadora, Kidde Global Solutions se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 11 April 2024 - 14:00