

POC252-1CX-1P

Convertidor de medios de 1 puerto alimentado a través de coaxial con POE-AT. Cámara.

Overview

The IFS® Power over Coax Network Switches and Media Converters by Interlogix® are designed to transmit both Ethernet data and PoE over coax cable up to 1 km (3,280 ft). This solution provides a cost-effective approach by reducing installation cost and increasing ROI by utilizing existing coax to migrate an existing analog video system to an IP video surveillance system.

The PoC Network Switches and Media Converters also provide built-in PD-alive monitor health and status of an IP camera. In addition, this solution eliminates the need for providing local power at an IP PoE camera location.

- The POC2502-8CXP-2T-2S is an 8-port Power over Coax Managed Switch that supplies data and power transmission on coax via BNC ports. In addition, the two RJ45/SFP Gigabit combo ports provide a connection to an Ethernet network.

- The POC2502-16CXP-2T-2S is a 16-port Power over Coax Managed Switch. The switch supplies data and power transmission on coax via BNC ports as well as two RJ45/SFP Gigabit combo ports for connection to an Ethernet network.

- The POC252-1CX-1P Power over Coax Media Converter is for use at the camera end to convert the data/power from the coax. The switch provides 10/100Mbps data and POE-af/at compliant power on the RJ45 port for an IP camera.

- The POC252-1CXP-1T Power over Coax Media Converter transmits data and injects power over coax for use with the POC252-1CX-1P. This is used to deploy a single IP camera on a length of coax cable and a multi-port BNC switch is not needed.



Detalles

- 1 Port (RJ45) with PoE-at support (upto Max. 25W)
- Auto-negotiation and auto-MDI/MDI-X
- IEEE 1901 communication Standard
- Wavelet-OFDM modulation
- 128-bit AES security encryption
- Daisy-chain (up to 3 devices on one link)
- Half-duplex back pressure and IEEE802.3x full-duplex pause-frame flow control
- Remote power up to 1Km
- Compatible with POC252 Switches and Head End Media Converter

POC252-1CX-1P

Convertidor de medios de 1 puerto alimentado a través de coaxial con POE-AT. Cámara.

Especificaciones técnicas

General

Tecnología	IEEE1901
Compatible con bastidor	No
MCR	

Conexiones

Puertos coaxiales	1
Conector	BNC
Puertos RJ45	1
Tipo de puerto	10/100
Salida de relé de avería	No

Eléctrico

Tipo de fuente de alimentación	Alimentación a través de coaxial
Consumo de corriente	25 W
PoE / PoE+	PoE-at
Capacidad de alimentación PoE	Up to 25 W
Alimentación redundante	No

Físico

Dimensiones físicas	94 x 70 x 26 mm
Peso neto	375 g
Color	Negro
Tipo de Montaje	Montaje en pared

Medioambiental

Temperatura de funcionamiento	-10 to +60°C
Temperatura de almacenamiento	-40 to 75°C
Humedad relativa	0 to 95% noncondensing

Physical Ports

10/100Base-T(x) Ports	RJ-45 (1) & BNC (1)
Port Configuration	Auto MDI/MDI-X
Port Speed	Auto-negotiate
LED Indicators and Switch	

Regulatory

Regulatory Standards	FCC Part 15 Class A, CE
IEEE Standards	IEEE 802.3 Ethernet
	IEEE 802.3u Fast Ethernet
	IEEE 802.3af Power over Ethernet
	IEEE 802.3at Power over Ethernet Plus

Power over Ethernet

PoE Standard	IEEE 802.3af / 802.3at PoE
PoE Power Supply Type	End-span
PoE Power Budget	Upto 25W via Coax
Power Pin Assignment (RJ45)	1/2(+), 3/6(-)
Power Pin Assignment (COAX)	BNC center pole : DC+ / Hi, BNC shield : DC - / Lo

IP Over Coax Interface

Cabling	Coaxial cable: 75 ohm, RG-6/U cable (Improved Performance)
	RG-6/U cable, less than 120hm/1,000ft.
	RG59/U cable, less than 300hm/1,000ft.
Ethernet Communication Standard	IEEE1901
Modulation Type	Wavelet-OFDM
Security	128-bit AES encryption
Frequency Band	2 ~ 28 MHz

Data Rate (Upload/Download)*

200m	93 / 93 Mbps
400m	93 / 92 Mbps
600m	92 / 88 Mbps
800m	83 / 75 Mbps
1000m	74 / 55 Mbps

Typical Power Over Coax*

200m	29W (56VDC in) 16.9W (PoE+ in)
400m	22W (56VDC in) 14.3W (PoE+ in)
600m	13W (56VDC in) 10.2W (PoE+ in)
800m	10W (56VDC in) 8.3W (PoE+ in)
1000m	8W (56VDC in) 7.1W (PoE+ in)


* Based on RG-59 Bare Copper cable: Data rate and power performance is subject to the quality of cable used and environmental factors.

Maximum Distance

PoE+ output	200m
PoE output	600m
Without PoE (Data only)	1,200m

POC252-1CX-1P

Convertidor de medios de 1 puerto alimentado a través de coaxial con POE-AT. Cámara.

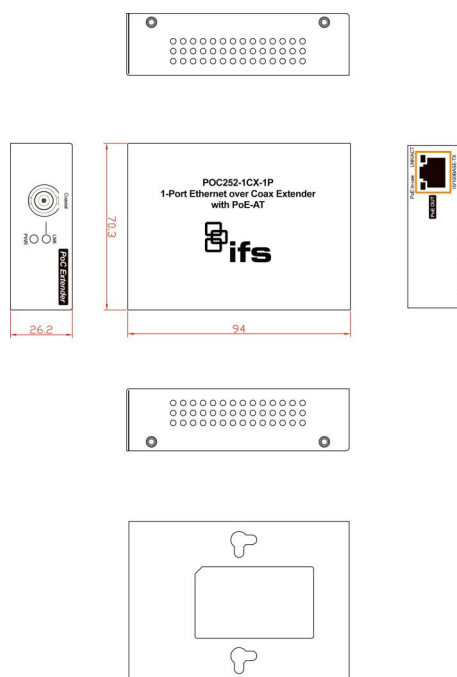

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 22 May 2023 - 16:24