

TVGP-M01-0401-TUR-G

TruVision 4MP, H.265+, Smart IP Turret Camera, 30 m IR, 2.8 mm lens, grey

Product overview

The TruVision M-series IP turret cameras leverages the latest H.265+ video compression technology to bring state-of-the-art, high-definition pictures to the mass video surveillance market. With video resolutions from 2 Megapixel to 4K, these IP cameras represent a flexible video surveillance device to meet any need. Equipped with advanced technology and signal processing capability, they effectively capture video under challenging conditions.

The cameras go above and beyond standard motion detection with enhanced alarm capabilities, including cross line detection, intrusion detection and face detection features. With its smart person/vehicle feature the camera can ignore irrelevant motion or VCA events which will automatically lead to less storage consumption and faster retrieval of relevant video events.

TruVision cameras utilize H.265+ and/or H.264 compression technology with triple-streaming capability, making it easy to manage the camera's bandwidth usage. Recording to a local MicroSD card (not included) protects data in the event of network disruptions.



Yksityiskohdat

- Maximum resolution: 4MP (2688 x 1520)
- Person/vehicle classification
- Video intelligence: intrusion detection, cross line detection, face detection
- Up to 30 m IR illumination
- H.265+ compression
- ONVIF Profile G, S, T open standards
- Edge recording up to 256 GB SDHC card

TVGP-M01-0401-TUR-G

TruVision 4MP, H.265+, Smart IP Turret Camera, 30 m IR, 2.8 mm lens, grey

Tekniset tiedot

Yleinen

Technology	IP
Videostandardi	NTSC, PAL
Image settings	Hallway View, Mirror, ROI (Region Of Interest)
Yksityisyyden suoja	Yes
Ohjelmistojen yhteensopivuus	Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, Web Browser

Kamera

Kennon koko	1/3"
Max. resolution	4 MP
Sensor scan	Progressive
Kennon tyyppi	CMOS
Suljinaika	1/3 to 1/100,000 s

Valaistuksen suorituskyky

WDR-tyyppi	True WDR
WDR	120 dB
Digitaalinen kohinanvaimennus	3D DNR
Päivä / Yö	True Day/Night
Motorized IR cut filter	Jo
Color sensitivity	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with IR on
Infrared (IR)	Jo
IR range	Up to 30 m
IR-aallonpituus	850 nm

Koodaus

Video streamit	3
Main stream pakkaus	H.264, H.265, H.265+
Sub stream pakkaus	H.264, H.265, MJPEG
Kolmannen streamin pakkaus	H.264, H.265
Videon bittinopeus	32 to 8 Mbps
Main stream resoluutio	1280 x 720 (XVGA), 1920 x 1080 (1080p), 2688 x 1520
Sub stream resoluutiot	640 x 360 (nHD), 640 x 480 (VGA)
Kolmannen streamin resoluutiot	1280 x 720 (XVGA), 640 x 360 (nHD), 640 x 480 (VGA)
Max. resoluutio @ fps	2688 x 1520 @ 25/30 fps

Linssi

Lens type	Kiinteä
Focal length	2.8 mm, horizontal FoV 103°, vertical FoV 55°, diagonal FoV 122°
f-stop	F1.6
Auto iris	Ei

Verkko

Verkkoliitäntä	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integraatio	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Tuetut verkkoprotokollat	802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP

Varastointi

Paikallisen tallennustilan tyyppi	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	256 GB

Video älykkyyks

Häilytyksen liipaisin	HDD error, HDD full, Invalid login, IP address conflict, Motion detection, Network disconnected, Video tampering
ROI	Support 1 fixed region for main stream and sub-stream
Smart event	Advanced motion detection, Face detection, Intrusion detection, Line crossing detection, Motion detection
Älykkyyden vaihtoehdot	Person/vehicle detection on motion, line crossing and intrusion detection

Sähkö-

Operating voltage	12 VDC, 0.5 A, PoE (802.3af, 36 to 57 V), 0.19 to 0.12 A
Power consumption	max. 7 W

Fyysinen

Physical dimensions	Ø127.3 x 95.9 mm Ø5.01 x 3.78 in.
Nettopaino	600 g 1.3 lb.
Kuljetuspaino	816 g 1.8 lb.
Colour	Harmaa
Materiaali	Alumiini
Form Factor	Tornin

Ympäristö-

Ympäristö	Ulkoilma
Käyttölämpötila	-30 to +60°C -22 to +140°F
Suhteellinen kosteus	<95% noncondensing
IP rating	IP67

Säätely


Compliance	CE, FCC, REACH, RoHS 3, WEEE
------------	------------------------------

TVGP-M01-0401-TUR-G

TruVision 4MP, H.265+, Smart IP Turret Camera, 30 m IR, 2.8 mm lens, grey

Yhteensopivat tuotteet

Kategoria	Viite	Kuvaus
Kiinnikkeet ja Asennusjalat	TVD-BB3	
Kiinnikkeet ja Asennusjalat	TVD-BB3A	
Kiinnikkeet ja Asennusjalat	TVD-CB3	
Kiinnikkeet ja Asennusjalat	TVD-CBW	
Kiinnikkeet ja Asennusjalat	TVD-M-PMA-SS	
Kiinnikkeet ja Asennusjalat	TVD-M2-WM	
Kiinnikkeet ja Asennusjalat	TVD-PPB	
Kiinnikkeet ja Asennusjalat	TVD-SNB	

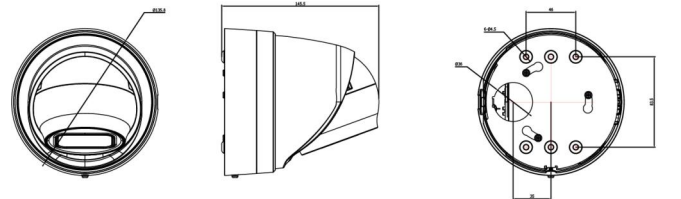

Unit: mm



Carrier Fire & Security pidättää oikeuden muuttaa tuotetietoja ilman ilmoitusta. Jotta saisit uudet tuotetiedot, vieraille fi.firesecurityproducts.com nettisivuilla tai ota yhteyttä myyjääsi.

Last updated on 21 October 2024 - 10:18