
2010-2-UC240-KIT

UC240 Kit (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable

Overview

UC240 UltraSync communicator is a dual path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on IP and SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

- Dual-path monitoring for low, medium and high risk sites, covering intruder applications, fire and more.
- These monitored alarm signalling devices are small enough to fit inside most alarm panels. They use two signalling paths – if the primary path is down, the secondary path kicks in. And if that happens, the secondary path will use the primary path reporting and polling times.
- The primary path uses IP technology to send alarm signals over the customer's network or broadband hub.
- The secondary path uses 4G or 2G mobile connectivity – with dual SIMs for extra resilience.
- EN50131 Grade 3 and EN50136 certified for intrusion systems.
- EN54-21 certified for fire alarm systems.

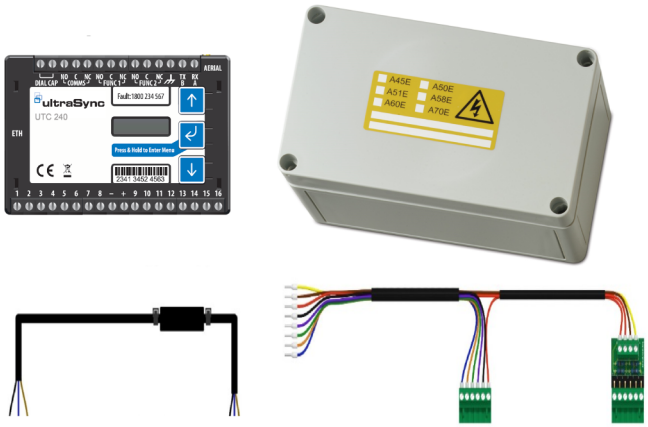

Alarm panel interfaces

- 16 general purpose alarm inputs (Logic High = +2 to +30 V / Logic Low = <1.3 V)
- 3 relay outputs
- Unconnected state: Logic Low
- Standard screw terminals
- Programmable function output-for remote control of site devices
- Line fault output-for status indication at site of alarm signalling path
- Dial Capture with phone line simulation
- Onboard RS232 or RS485 for direct panel interface to some panels

Dial Capture features

- Converts dialler alarm systems into high security signalling devices
- Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

Configuration

- Simple single push button pin learn
- iOS and Android installer app
- Using on board menu driven by push buttons

2010-2-UC240-KIT

UC240 Kit (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable

Spécifications techniques

Général

Gamme de produits	UltraSync

Réseau

Type de communicateur	2G, 4G, Cellular, IP
Fréquence GSM	LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS Dual band (900/1800 MHz)

Rapport

Rapport de protocoles	Contact ID, SIA
Récepteurs pris en charge	UltraConnect

Interfaces

Ethernet	RJ-45 1000 Mbps Ethernet Interface
Antenne	Yes, included

Entrée / sortie

Entrées	16 general purpose alarm inputs
Sorties	3 relay outputs

Électrique

Tension de fonctionnement	9.5 to 30 VDC
Consommation de courant	85mA @12 VDC, 185mA @24 VDC (Maximum loading) 45mA @12 VDC, 100mA @24 VDC (Normal operation)

Caractéristiques physiques

Dimensions physiques	95 x 67 x 17 mm
Couleur	Noir

Environnement

Température de fonctionnement	-10 to +55°C
Humidité relative	5 to 75%
Environnement	EN50130-5 ; Classe II - Intérieur (général)

Régulateur

Certification	EN50131 Grade 3, EN50136, EN54-21

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 16 June 2026 - 15:33