AACUSP

Alarmline II Analogue LHD Control Unit - Self Programmable

General

The AACUSP is a self programmable, Analogue Liner Heat Detection (LHD) cable control unit. It provides monitoring for any of the Alarmline II range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system.



Interface & Programming

The AACULP provides LED indications as well as an LCD. Internal pushbuttons allow configuration without the need for a PC.

Pre-Alarm and Alarm thresholds can be set through simple menu options with no need for any graphs or nomograms. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable removing the need to know the sensor cable length.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality.

Operation

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged.It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. When the LHD sensor cable and the control unit are installed in different areas, a suitable interposing cable can be used to make the electrical connection between them.

Détails

- UL521 and CE approval, UL/ULC listed
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP66 rated enclosure
- No nomograms or charts required

AACUSP

Alarmline II Analogue LHD Control Unit - Self Programmable

Spécifications techniques

Électrique

Tension de fonctionnement	20 to 28 VDC
Consommation de courant	<70mA (Quiescent) <70mA (Fault) <80mA (Pre-Alarm) <80mA (Alarm) <100mA (Pre-alarm & alarm)

Caractéristiques physiques

Dimensions physiques	182 x 180 x 90 mm (W x H x D) 7 1/8" x 7 1/8" x 3 1/2" (W x H x D)
Poids net	815 g
Couleur	Gris léger
Type de montage	Montage encastré
Matériel (boîte)	Polycarbonate

Environnement

Température de fonctionnement	0 to +50°C
Humidité relative	0 to 95% max. noncondensing, 75% for <75 m cable & 54°C alarm setting
Environnement	Intérieur, Extérieur
Indice de protection	IP66 IK08

Régulateur

Certification	CE, UL

Output

Pre-Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Fault (Opto-isolated phototransistor output) Max.	50 V @ 20 mA

Input


Remote reset (isolated) 5s pulse	20 to 28 VDC

Zone

Length	30.5 to 500 m (100 to 1640 ft)

Detection

Ambient Temperature up to 30°C	Alarm Temperature - 54°C
Ambient Temperature up to 47°C	Alarm Temperatures - 64°C / 72°C / 79°C
Ambient Temperature up to 69°C	Alarm Temperatures - 86°C / 100°C

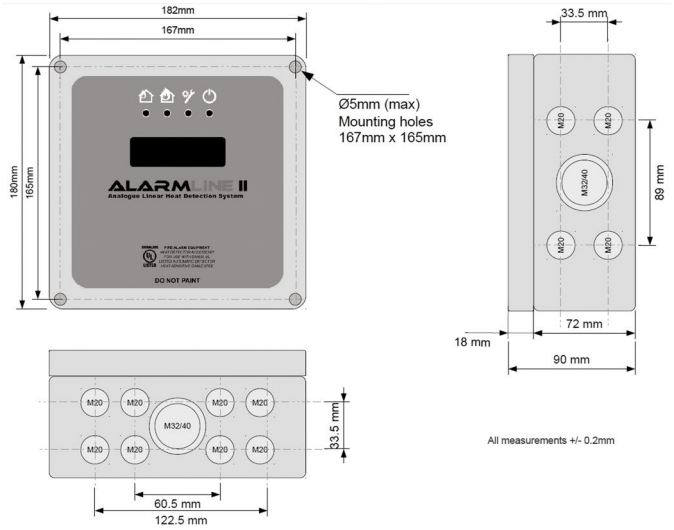

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 24 March 2026 - 15:52