# AAECU-EOL

## AlarmLine II Analogue EN LHD Replacement Part – EOL module

### General

The AAECU-EOL is a replacement End-Of-Line unit for use with the AlarmLine II Analogue EN Liner Heat Detection (LHD) cable control unit. The AAECU control unit is supplied with an AAECU-EOL included, but in case the unit is lost or damaged then the AAECU-EOL can be supplied separately.




### Détails

- VdS EN54-22:2015/prA1:2007

# AAECU-EOL

## AlarmLine II Analogue EN LHD Replacement Part – EOL module

## Spécifications techniques

### Caractéristiques physiques

| | |
|---|---|
| Dimensions physiques | 100 x 35 x 60 mm (W x H x D)<br>4" x 1 3/8" x 2 3/8" (W x H x D) |
| Poids net | 115 g |
| Type de montage | Montage en surface |
| Matériel (boîte) | Aluminium |

### Environnement

| | |
|---|---|
| Température de fonctionnement | -40 to +125°C |
| Humidité relative | 0 to 99% ambient temperature -40 to +40°C / 0 to 75% ambient temperature greater than +40°C |
| Indice de protection | IP65 |

### Régulateur

| | |
|---|---|
| Certification | CE, EN54-22, VdS |

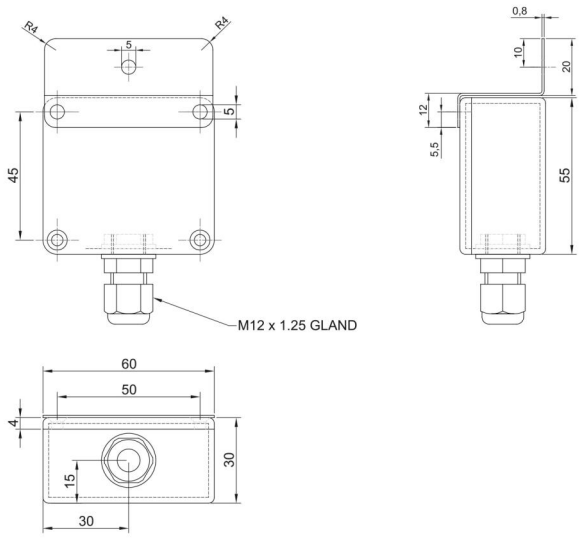



*Figure 3. AlarmLine II Analogue EN EOL unit Dimensional Drawing*

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 3 February 2025 - 15:43