
ACT786-37

Prox II card ISO thickness sitecode 37

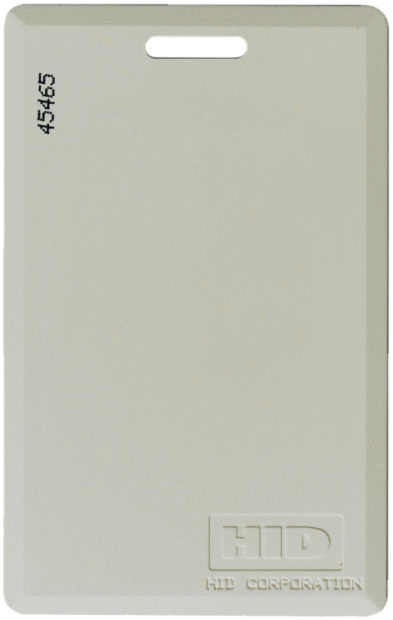

Détails

- Offers universal compatibility with all HID proximity readers.
- Provides durable packaging and consistent read range
- Provides an external number for easy identification and control
- HID standard 32-bit configuration
- Meets ISO standards for thickness; use with all direct image or thermal transfer printers
- Accepts either a horizontal or vertical slot punch

ACT786-37

Prox II card ISO thickness sitecode 37

Spécifications techniques

Système

Types de lecteurs	Lecteur de proximité HID

Technologie

Type d'identifiant	Proximité
Fréquence de fonctionnement des identifiants	125 KHz

Caractéristiques physiques

Types de format	CR80 (Crédit)
Dimensions physiques	54 x 87 x 0.8 mm
Poids net	6.8 g

Environnement

Température de fonctionnement	-45 to +70°C
Humidité relative	5 to 95% noncondensing

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 26 March 2024 - 15:16