ASW367

Conventional Wall Mount VAD, Multi Tone, Deep Base - Red Flash

General

The ASW367 is a RED, general purpose, wall mount, electronic sounder and beacon for fire alarm applications. It features a special base containing all wiring connections allowing for easy placement or removal of the device. With an EN54-23 approved coverage pattern of W-2.4-7.5 for the beacon, each ASW367 may be mounted up to 2.4 m high and cover a square room of 7.5 x 7.5 m with a single device.



Easy and fast installation

The ASx360 series alarm sounder/beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws these devices use TimeSaver™ bases from the 630 series detector lines. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

Efficient and versatile

The ASx360 series sounders provide high sound output at a low current, thus reducing power requirements and system cost. They are supplied with a volume control as standard, allowing final audio adjustments to be made during installation. With a choice of 32 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation.

The ASx360 series beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the sounder from the base.

Détails

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic syncronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Deep mouting base with side cable entry and wiring to the base
- Weatherproof
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASW367

Conventional Wall Mount VAD, Multi Tone, Deep Base - Red Flash

Spécifications techniques

Général

Compatibilité	All conventional notification circuits
Surveillance de ligne	Polarised input

Électrique

Type de bloc d’alimentation	VDC
Tension de fonctionnement	17 to 60 VDC
Consommation de courant	5.1 mA (sounder) 20 mA @ 0.5 Hz (VAD)

Sirène

Niveau de sortie	85 to 97dB(A) @ 1 m (tone dependant)
Tonalités sélectionnables	32
Synchronisation	Phased start

VAD

Couleur	Red
Évaluation	W-2.4-7.5
Couverture de sol	56.25 m²
Fréquence du flash	0.5 Hz
Synchronisation	Supported

Caractéristiques physiques

Dimensions physiques	97.5 x 117 mm (Ø x D)
Poids net	215 g
Couleur	Rouge
Type de montage	Assemblage sur socle
Position de montage	Wall
Hauteur de montage	up to 2.4 m
Base de fixation	Deep
Matériel	Polycarbonate haut impact
Texture	Smooth

Environnement

Protégé contre le vandalisme	Non
Température de fonctionnement	-10 to +55˚C
Humidité relative	5 to 95% noncondensing
Environnement	Intérieur, Extérieur
Indice de protection	IP65

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	CPR
Normes	EN54-3; EN54-23


Regulatory

Voluntary marks (all languages)	BOSEC

Produits compatibles

Catégorie	Référence	Description
Module de notification	ASW366	Conventional Wall Mount VAD, Multi Tone, Shallow Base - Red Flash
Module de notification	ASW366W	Conventional Wall Mount VAD, Multi Tone, Shallow Base - Red Flash
Module de notification	ASW367W	Conventional Wall Mount VAD, Multi Tone, Deep Base - Red Flash

EN54-23 Coverage: W–2.4-7.5

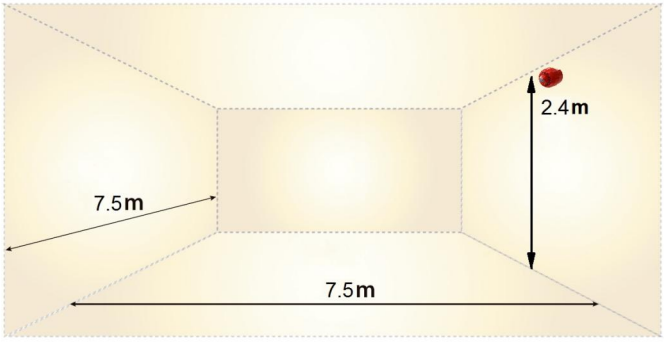

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 19 March 2026 - 13:34