
ATS1330

Carte de distribution des connections

Carte de dsitribution des connexions

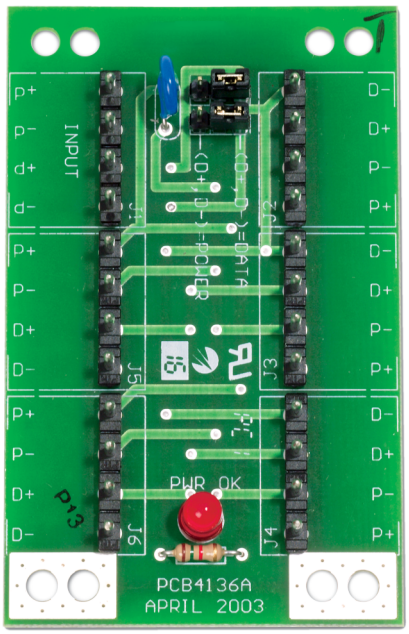

Détails

- Provides a simple means of star connecting
- Fitted with a single protected input port and five paralleled output ports.
- Compatible with Axon and Advisor Advanced panels
- Traditional power and comms or power alone.
- Provides a power OK LED for easy diagnosis.

ATS1330

Carte de distribution des connections

Spécifications techniques

Général

Groupe d'accessoires	Advisor Advanced, ATS Master
Type	Pièce de rechange

Caractéristiques physiques

Dimensions physiques	86 x 54 mm (W x H)

Environnement

Température de fonctionnement	0 to 50 °C
Humidité relative	95% noncondensing

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 16 June 2026 - 15:33