
ATS1483

ATS118x to Unsecure Mode

Product Overview

The ATS1483 ATS118x to Unsecure Mode configuration card allow to configure the ATS1180 or ATS1181 to ATS1160/61N Mifare reader mode (unsecure mode) without any programming device or menu configuration.

The configuration card has to be applied when the reader is not online.

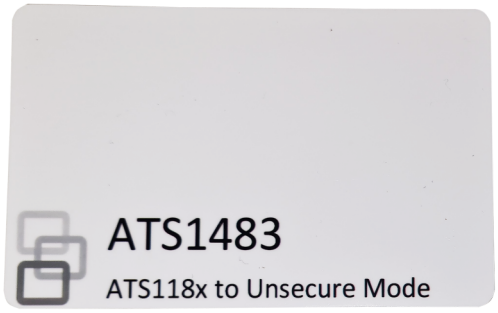

Détails

- When applied configures ATS1180/ATS1181 to ATS1160N/ATS1161N mode
- Apply when reader not online

ATS1483

ATS118x to Unsecure Mode

Spécifications techniques

Système

Distance de lecture	min 1 cm
Modèle de données personnalisé	Non
Types de lecteurs	ATS ATS118x Secure Readers

Technologie

Type d'identifiant	Carte de configuration, Carte à puce
Fréquence de fonctionnement des identifiants	13.56 MHz

Impression

Impression directe recto	Oui

Informations de commande

Quantité minimum par commande	1
Cartes / jetons (par lot)	1

Caractéristiques physiques

Matériel	Chlorure de polyvinyle (PVC)
Types de format	CR80 (Crédit)
Dimensions physiques	86 x 54 mm
Couleur	Blanc
Étiquette de carte	Programming Card

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 15:13