CDC-2DWIF

CDC 2 door Wiegand interface with 2 relays and 4 inputs (board only) for CDC4 range


Product Overview

The CDC-2DWIF is a Two Door Wiegand Interface with offering two Wiegand interfaces to connect two readers, two relays to control two doors and 4 inputs to connect door contacts and Request to exit buttons, or intrusion sensors. All are controlled through the CDC4 door and lift controller.

The unit will be polled as an expander/DGP on the RS485 data bus. Wiegand readers, relays and inputs can be assigned to any door or send straight to the Advisor Advanced control panel when needed. Using the readers, intrusion areas can be armed/disarmed using the same options as for all other doors on the CDC4.

Installation

The Two Door Wiegand Interface is added in the existing CDC4 door & lift controller housing.

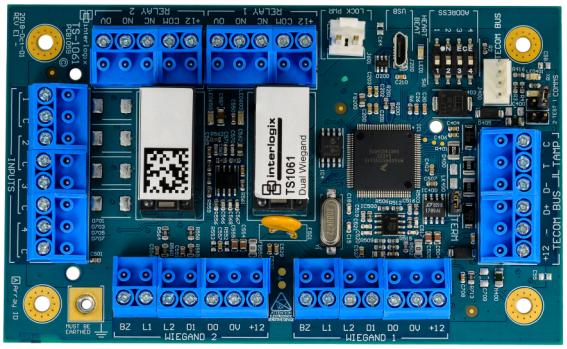

Détails

- Two Door interface with two Relays, four inputs and two Wiegand interfaces
- Extends relays, inputs to CDC4 and provides for Wiegand interfaces
- Polled as a DGP on the CDC4 data bus
- Specified cable - Aritech WCAT 52/54 or equivalent
- Inputs can be used for Request To Exit, door contact, intrusion sensor or for any other
- Two relays can be used to switch one or two doors or for any other purpose
- Supports Card data and PIN

CDC-2DWIF

CDC 2 door Wiegand interface with 2 relays and 4 inputs (board only) for CDC4 range

Spécifications techniques

Système

Distance max. entre le lecteur et la centrale	1.5 km from control panel
Type d'adressage	DIP Switches

Technologie

Type de lecteur	Interface
Fréquence de transmission du fonctionnement du lecteur	---

Interface et connexions

Interface	ATS RS-485, Wiegand
Type de connecteur	Bornier

Entrées / sorties

Entrées	Door position, Request to exit
Sorties	Aux relay - Form C, switches up to 1A @ 30 VDC

Électrique

Tension de fonctionnement	9.5 - 14.4 Vdc
Consommation de courant	73 (nom) - 450 mA (max)

Caractéristiques physiques

Dimensions physiques	128 x 78 x 21 mm
Poids net	255 g

Régulateur

Conformité	CE

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 14:23