DB860


Base standard, verrouillable

General

The 650 Series conventional detectors are designed for the highest effectiveness utilising the latest technology. A wide operating voltage (9 to 33 VDC) allows them to be used on any security system.

Standard base

The base enables detectors to be plugged in without any need for force - particularly useful when fitting to suspended ceilings. The base has a "one way only" fit and are lockable. They contain no electronic parts that could be damaged during installation. The detectors are polarity insensitive and bases are easy to wire with an earth connector.

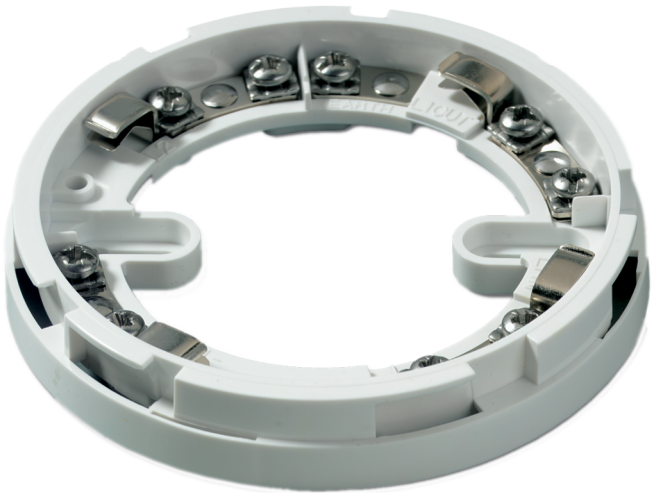

Détails

- Polarity insensitive
- Common base
- Elegant slim-line design
- May be used on security systems

DB860

Base standard, verrouillable

Spécifications techniques

Général

Compatibilité	Apollo series 60 and 65 conventional detectors
Connectivity	2-wire conventional zone

Caractéristiques physiques

Dimensions physiques	100 x 8 mm (Ø x H)
Couleur	Blanc
Type de montage	Montage au plafond
Entrées de câble	1

Environnement

Protégé contre le vandalisme	Non
Environnement	Intérieur

Régulateur

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CE

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 14 March 2025 - 12:47