DC106R4.7


Recessed mount contact, flanged

Recessed contacts

The DC106 recessed contacts are designed for applications where the added integrity of mouting screws is needed. The units can be used in wooden and metal frame doors and windows.

Easy installation

The two mounting holes provide additional strength to prevent the contact and magnet from becoming dislodged due to environmental changes. This can occur when the door or window frames become warped and misaligned from moisture or the settling of a building.

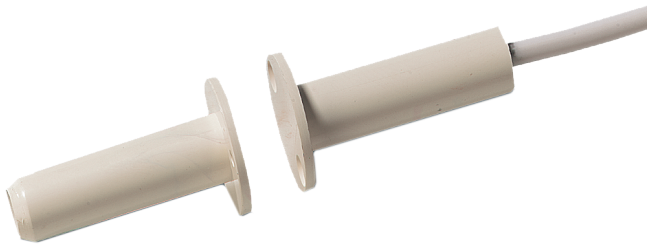

Détails

- Flange mounting for positive mounting
- Attractive, added security of recessed installation
- Easy installation
- Standard 2.5 m wire length
- Tamper loop provided
- Built-in resistors available to special order
- Mounting screws supplied

DC106R4.7

Recessed mount contact, flanged

Spécifications techniques

Général

Type d'application	Montage encastré
Type de contact	4K7 end-of-line resistor
Connectivité	4 wires, 2.5 m

Filaire / sans fil

Filaire / sans fil	Câblés
Déficit de fonctionnement	23 mm

Caractéristiques physiques


Dimensions physiques	19 x 33 mm
Dimensions du capteur magnétique	19 x 33 mm
Diamètre	9.5 mm
Diamètre de perçage	9.5 mm
Couleur	Blanc

Environnement

Température de fonctionnement	-40 to +65°C

Régulateur

EN50131 Grade	Grade 2

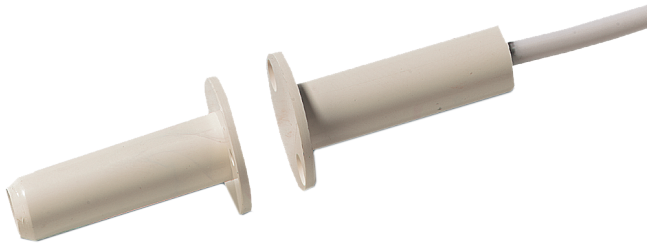

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 13 August 2026 - 11:05