DC107R4.7

1078C, DC107 4.7 k, VdS, contact

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Détails

- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107R4.7

1078C, DC107 4.7 k, VdS, contact

Spécifications techniques

Général

Type d'application	Montage encastré
Type de contact	4K7 end-of-line resistor
Connectivité	4 wires, 2.5 m

Filaire / sans fil


Filaire / sans fil	Câblés
Déficit de fonctionnement	9 mm (max.)

Caractéristiques physiques

Dimensions physiques	22 x 39 mm (Ø x H)
Diamètre de perçage	19 mm
Couleur	Blanc

Régulateur

EN50131 Grade	Grade 2

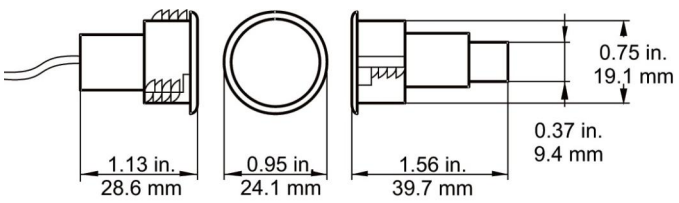

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 13 August 2026 - 11:05