DC108R4.7

Gate and roller shutter sensor with 4K7 end of line resistor

Overhead door magnetic contact

The DC108 series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

Easy installation

A wide operating gap distance of up to 7.5 cm makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.



Détails

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Wide working gap for overhead doors
- Small size less likely to be damaged by forklifts
- Tamper loop provided

DC108R4.7

Gate and roller shutter sensor with 4K7 end of line resistor

Spécifications techniques

Général

Type d'application	Montage en surface
Type de contact	4K7 end-of-line resistor
Connectivité	4 wires, 2 m (armoured cable)

Filaire / sans fil


Filaire / sans fil	Câblés
Déficit de fonctionnement	75 mm (max.)

Caractéristiques physiques

Dimensions du capteur magnétique	89 x 39 x 39 mm
Dimensions contact / capteur	89 x 39 x 39 mm
Matériel	Aluminium

Régulateur

EN50131 Grade	Grade 2

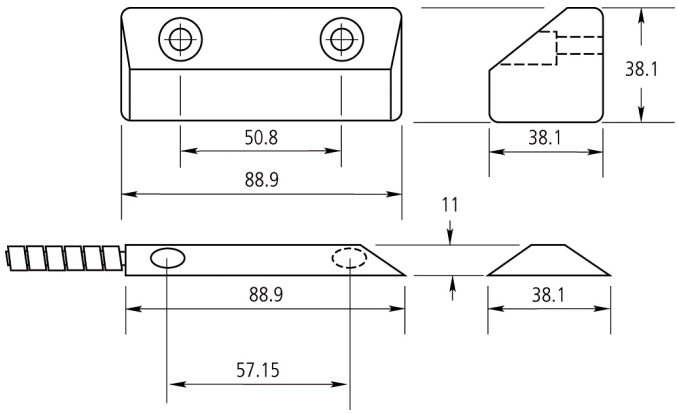

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 13 August 2026 - 11:05