DC888

Steel door recessed mount contact, wide gap, small housing

Application

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Détails

- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC888

Steel door recessed mount contact, wide gap, small housing

Spécifications techniques

Général

Application type	Montage encastré
Contact type	NC
Connectivity	4 wires, 2 m

Filaire / sans fil

Wired-wireless	Câblés
Operating gap	18 mm (max.)

Caractéristiques physiques

Dimensions physiques	22 x 39 mm (Ø x L)
Diamètre de perçage	19 mm
Colour	Blanc

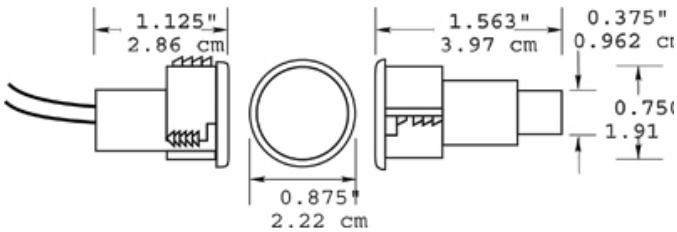

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 13 August 2026 - 11:05