
DF400

ultraLink processor module with 8/8 relay outputs/inputs. DIN-rail mount

Ultralink I/O modules are used to receive and/or transmit alarm information as part of an integrated security system.
Applications include:
-Converting FlexZone sensor alamr collected over the Silver Network to relays or open-collector outputs for input to a 3rd party Secuity Management System.
-Collecting auxiliary sensor alarms with dry-contact inpiuts for display with a Management system.

The Ultralink I/O module connects to the SIlver Network via a communication card. Up to 8 Ultralink expansion modules can be attached to one UltraLink module (DF432). Configuring the mods of operation of the relay ouputs, open-collector outputs and dry-contact inputs is done with the UCM software. The UCM can be connected to the Ultralink modules either by a direct USB connector to the I/O processor or by an IP connection via the Network manager Software.

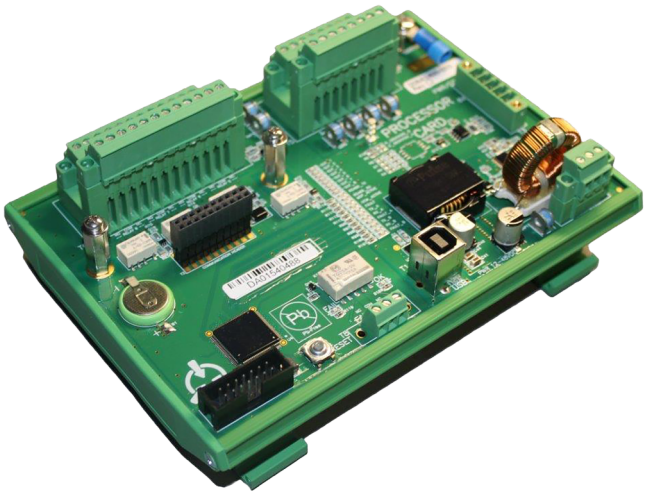

Détails

- Hosts one network communication card
- Expansion port for up to 8 Ultralink expansion modules
- USB configuration port
- 8 relay outputs
- 8 dry-contact inputs
- Supplies power to connected modules
- Modular system comprised of processor module, relay module, open-collector output module & dry-contact input module

DF400

ultraLink processor module with 8/8 relay outputs/inputs. DIN-rail mount

Spécifications techniques

Général

Catégorie	FlexZone
Type de produit	Unité de contrôle FlexZone

Électrique

Tension de fonctionnement	12 to 48 VDC

Caractéristiques physiques

Dimensions physiques	160 x 118 mm

Environnement

Humidité relative	0 to 95%, non condensing
Environnement	Intérieur

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 5 May 2023 - 9:37