DF410

Wireless gate sensor module, battery powered, gray enclosure

Product overview

The compact, all-weather FlexZone Wireless Gate Sensor DF410 is attached directly onto the gate fabric and transmits alarm data to a nearby system over an encrypted link. The DF410 sensor module is powered from its internal batteries, eliminating the need to route cables from the fence to the gate. The Wireless Gate Sensor simplifies maintenance, is easy to install, and works reliably in the most harsh environments.

The FlexZone Wireless Gate Sensor DF410 consists of two main components: the sensor module and a receiver card installed inside a FlexZone processor. The sensor module analyzes vibration, motion and position data. It transmits intrusion and supervision alarms, power levels, RF link status, and auxiliary input state to the receiver card over the encrypted wireless link.

Simplified maintenance

The sensor module includes an auxiliary input cable for monitoring gate contacts. The unit is battery powered and uses a standard, field-replaceable ‘D’ size battery which has a life-span of over a year. Both versions include on-board reserve emergency power for interim operation.

Secure communication

The Wireless Gate Sensor integrates into the existing sensor network, with the host device reporting the sensor’s alarm, tilt, RF link, power, and auxiliary input status. The RF link between the sensor module and receiver uses 128-bit encryption and the system generates a supervision alarm if anyone attempts to jam or otherwise interfere with the sensor module.

The maximum distance between the Wireless Gate Sensor and the processor/gateway hosting the receiver card can be up to 300 m under ideal conditions; a maximum distance of up to 100 m is recommended for site designs.



Détails

- Detect intrusion attempts on sliding and swinging gates
- Wireless operation eliminates need to route cables from fence to moving gate panels
- Up to 300 m transmission range from FlexZone processor
- Secure, 128-bit encrypted RF transmissions
- Supervised input for auxiliary device alarm reporting

DF410

Wireless gate sensor module, battery powered, gray enclosure

Spécifications techniques

Général

Catégorie	FlexZone
Type de produit	Unité de contrôle FlexZone
Fréquence	863.0 to 870.0 MHz

Détection

Gamme	up to 300 m

Électrique


Tension de fonctionnement	1.5 V
Consommation électrique	3 mW (avg) to 0.5 W
Batteries	D-sized battery 1.5V

Caractéristiques physiques

Dimensions physiques	149 x 121 x 60 mm
Poids net	640 g

Environnement

Température de fonctionnement	-40 to 70 °C
Humidité relative	100% condensing
Indice de protection	IP66

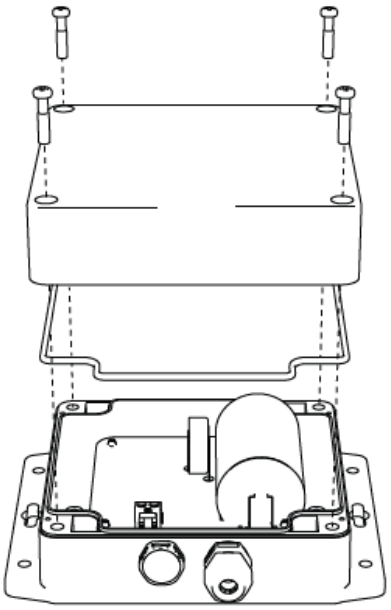

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 September 2026 - 9:14