
EVERON-4700-STEP-UP

Always On. Always Aware.
EVERON-4700-STEP-UP

Product overview

Everon upgrade kit

This kit contains the components needed to change the panel from Master to Everon or from Advisor Advance to Everon.
The kit contains the panel-MBC and MBC mounting plate, Power Supply Unit (PSU), PSU mounting bracket, Cables/NTC/Stand-offs and User manual. There are no Keypads or housings, etc included in this kit.

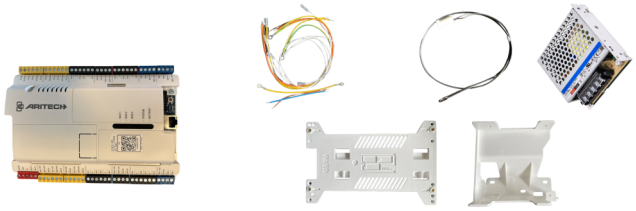

Détails

- Everon 4700-MBC and ATSX700-RETRO, in ONE kit.
- Everon 4700-MBC
- MBC mounting plate
- Power Supply Unit (PSU)
- PSU mounting bracket
- Cables, NTC sensor, stand-offs and user manual

EVERON-4700-STEP-UP

Always On. Always Aware.
EVERON-4700-STEP-UP

Spécifications techniques

Système

Product line	Everon
Product type	Contrôle d'accès intégré
Panel type	Hybride
Kit	Non
No. of keypads / readers	32
Data Gathering Panels (DGP)	30
No. of alarm groups	256
Specified cable	WCAT52 / WCAT54 or equivalent

Entrées

Max no. of inputs	1000
Onboard inputs	16
Inputs plug-in expansion	8
ATS1202 support	3

Sorties

No. of outputs	128
No. of onboard outputs	3 electronic outputs + 4 relays

Zone

No. of areas	16

Utilisateur / cartes

Max. no. of users	Up to 65532
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Contrôle d'accès

Standard doors on control panel	16
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	48

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, IP
Databus type	RS485

Journal des événements

Alarm event log	14500
Access event log	20000

Électrique

Operating voltage	24 VDC
Consommation de courant	800 mA max at 230VAC
Mainboard current consumption	110 mA at 24 V (PSU), 160 mA at 12 V (battery)
Max system current	950 mA at 13.8 V ±0.2 V
Max aux power current	3500 mA at 13.8 VDC ±0.4 V
Auto-reset fuses	3 (electrical, 1.3A per use)
Glass break fuses	1 (mains power, T-2A 230 VAC, slow)

Caractéristiques physiques

Physical dimensions	199 x 140 x 45 mm
Net weight	405 g

Environnement

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP31

Régulateur

Compliancy	CE

Produits compatibles

Catégorie	Référence	Description
Clavier	ATS1125	
Clavier	ATS1125-B	
Clavier	ATS1140	
Modules de communication	ATS7341	
Modules de communication	ATS7341-SIM	

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 7 May 2026 - 16:34