FAC355

Conventional VAD, Deep Base, Ceiling Mount - Red Flash

General

The FAC355 is a general purpose ceiling mount LED beacon for fire alarm applications. It features a special deep base containing all wiring connections and allow for easy removal/placement of the device. With an EN54-23 approved coverage pattern of C-3-8.9, each FAC355 may be mounted up to 3m high and provide a 8.9m cylinder diameter coverage. A room size of 6.3 x 6.3m square room may therefore be covered with a single device.

Easy and Fast Installation

The FAx355 beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws, these beacons use TimeSaver™ bases from the 630 series detectors. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

Efficient and versatile

The FAx355 beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area. The flash rate of the beacon may be adjusted during installation, with a selection of 0.5Hz or 1Hz.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the beacon from the base.



Détails

- Automatic syncronisation
- Anti-Tamper locking mechanism
- Deep mouting base
- Wiring directly to base
- Flash rate selectable
- IP65 Ingress protection rating

FAC355

Conventional VAD, Deep Base, Ceiling Mount - Red Flash

Spécifications techniques

Général

Surveillance de ligne	Polarised input

Électrique

Tension de fonctionnement	17 to 60 VDC
Consommation de courant	20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Sirène

Niveau de sortie	Continuous operation
Synchronisation	Phased start (Automatic)

VAD

Couverture de sol	up to 8.9 m diameter

VID

Couleur	Red
Fréquence du flash	0.5 or 1 Hz 30 or 60 flashes/min

Caractéristiques physiques

Dimensions physiques	100 x 104 mm (Ø x D)
Poids net	250 g
Couleur	Rouge
Type de montage	Montage au plafond
Hauteur de montage	up to 3 m
Matériel	Polycarbonate haut impact

Environnement


Température de fonctionnement	-25 to +70°C
Humidité relative	5 to 95% noncondensing
Environnement	Intérieur, Extérieur
Indice de protection	IP65

Régulateur

Certification	EN54-23

EN54-23 rating

Light coverage	C-3-8.9

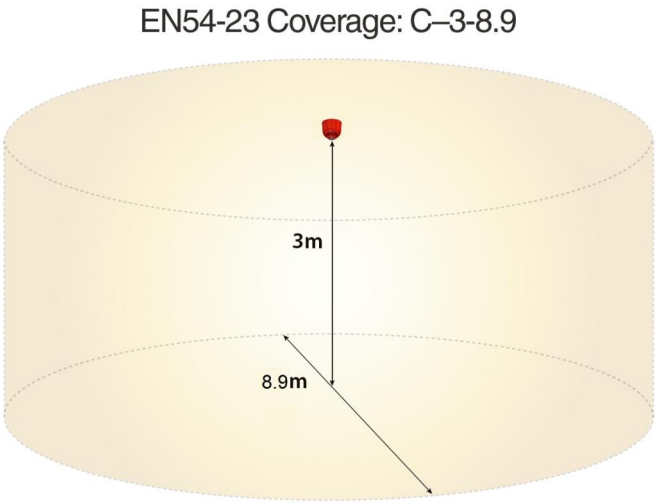

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 8:15