IO2034NC

2000 Series IO Unit 4 In / 4 Out

General

The IO2034NC is a 2000 series addressable 4 input/4 output unit with full input supervision and 4 magnetically latched relay outputs. The unit is loop powered and supplied in an enclosure for surface mounting applications.

The 2000 series input/output modules are designed to provide solutions to a multitude of applications for input monitoring and output switching. These modules, combined with the powerful features of the Aritech 2000/1200 and 2X series fire panels, gives the user versatility in many applications.

Configuration

2000 series IO units operate on the fire panel loops to monitor input contacts and independently switch relay outputs for control of external equipment. Each I/O module occupies only one address on the addressable loop regardless of the number of inputs or outputs on that module.


All 2000 series devices utilize an advanced digital data communications protocol with extensive error correction algorithms to ensure system reliability. Up to 128 devices may be installed on every communication loop. Device addressing is via two convenient, easy to use, rotary switches.

Inputs

All inputs are supervised for open, closed, active or passive states. The IO unit will report all states back to the panel where appropriate actions may be taken.

Outputs

Every output is a magnetically latched relay providing a potential free change-over contact. The output relays do not require additional power in either the active or passive states, allowing for a very low overall current consumption of the module even in an active state.

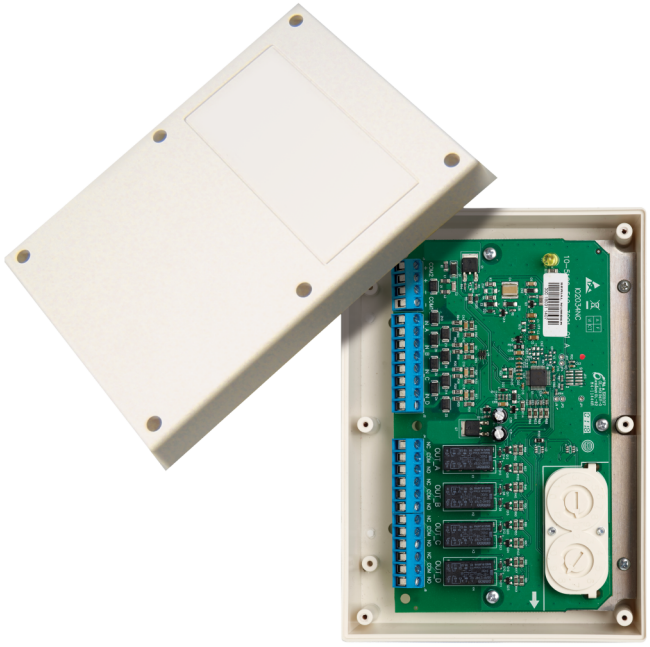

Détails

- In- and outputs individually programmable on a single loop address
- Versatile input structure with full line supervision
- Normally open or closed relay operation
- Magnetically latched output relays maintain relay positions in case of power failure
- Loop powering saves on external supply and installation costs
- Easy numeric addressing avoids addressing errors
- EN54 and CPR certified

IO2034NC
2000 Series IO Unit 4 In / 4 Out

Spécifications techniques

Général

Indication d'état	LED
Compatibilité	2000 Series Systems
Méthode d'adressage	Rotary switch
Plage d’adresses	1 to 128 (128 devices per loop)

Électrique

Type de bloc d’alimentation	Alimenté en boucle
Tension de fonctionnement	17 to 28 VDC
Consommation de courant	< 350 µA (Standby) 420 µA (Active)

Entrée

Quantité entrée	4
Type d'entrée et classe	Supervised
États d'entrée	Active, Normale, Open, Short
Résistance d'alarme	33 kΩ, ¼ W, 5%
Résistance de terminaison	150 kΩ, ¼ W, 5%

Sortie

Quantité des sorties	4
Type de sortie et classe	Relay 2A @ 30 VDC

Caractéristiques physiques

Dimensions physiques	175 x 124 x 51 mm
Poids net	100 g
Couleur	Blanc
Type de montage	Fixation murale
Matériel	Plastique
Spécification du câble	2-core (loop)

Environnement

Protégé contre le vandalisme	Non
Température de fonctionnement	-10 to +55°C
Température de stockage	-20 to +60°C
Humidité relative	10 to 95% noncondensing
Environnement	Intérieur
Indice de protection	IP40

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	CPR
Normes	EN54-18

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 6 May 2026 - 13:49