KE-ASA-AUXR

Intelligent addressable notification accessory - deep base (red)

General

The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it's a perfect match for exceptional overall performance.

The KE-DBA-AUXW is an Excellence series, surface mount base accessory. It allows cabling to be installed by running standard electrical conduit directly into the base, leaving no exposed cabling.

Preparation

The standard rear cable entry into the base is available with the same wide opening dimensions as the standard base with ample room for cables. In addition, four entry points are provided on the wall of the fixture to accommodate side entry, spaced at 90° around the base to allow entry and exit in all directions.

Installation

The conduit entry points are conveniently supplied with breakouts and drill locations to facilitate either installation method.

Keyhole screw fixing locations adds to the ease of installation, with built-in flexibility features to allow for mounting on uneven surface without distorting of the base.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.



Détails

- Large rear cable entry with ample space for cables
- Side conduit entry protects cables from damage
- Drill location and breakout support for conduit entry
- Support for uneven mounting surfaces with stress relief
- Installation fixture with first fix screw option reduces installation time and effort
- Dual address tag locations avoids alignment to make tags visible
- Supports standard Excellence series bases without feature loss, all base features remain usable
- Supports access to the selectable detector locking mechanism that protects against unauthorised detector removal

KE-ASA-AUXR

Intelligent addressable notification accessory - deep base (red)

Spécifications techniques

Caractéristiques physiques

Dimensions physiques	111 x 47 mm (Ø x H)
Poids net	165 g
Couleur	Blanc (RAL 9016)
Type de montage	Montage au plafond
Entrées de câble	5 (1 off rear, 4 off 25 mm (Ø) Conduit)
Matériel (boîte)	ABS moulé

Environnement


Protégé contre le vandalisme	Non
Température de fonctionnement	-30 to +85°C
Humidité relative	20 to 95% noncondensing
Environnement	Intérieur

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	CE

Produits compatibles

Catégorie	Référence	Description
Module de détection	KE-DB3010W	
Module de détection	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)

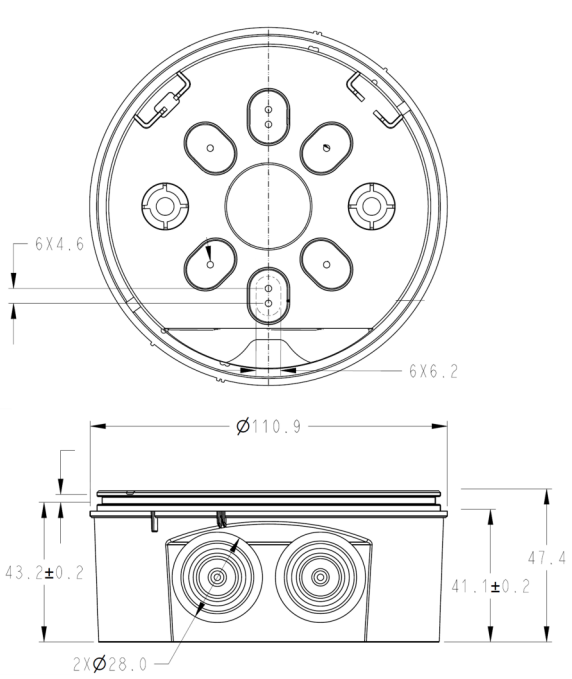

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 5 August 2026 - 7:12