KE-DBA-ADPW-ZIT

Intelligent addressable base accessory - Ziton adapter (White)

General

The KE-DBA-ADPW-ZIT is an Excellence series base adapter. It allows easy migration form a legacy Ziton ZP7 series installation by offering the possibility to keep the legacy standard base installation intact, but convert to the new Excellence series intelligent detectors.

Standard Base

The adapter base is designed to enable the new Excellence series detectors to be plugged in without any need for force - particularly useful when fitting to suspended ceilings. To make it even easier, the base has a "one way only" fit.

The adapter base contains no electronic parts that could be damaged during installation. It automatically locks into the legacy standard base just like fitting a detector The adapter also supports the option to lock the Excellence series detector in place to avoid unauthorised detector removal.

As with all Excellence series standard bases, the Excellence series base adapter supports Excellence series address tags for neat product identification labeling.



Détails

- Allows the reuse of legacy Ziton ZP7 standard bases without installation modification in systems upgrading to the new intelligent Excellence series detectors
- Automatic locking to legacy base avoids adapter removal when the new detector is removed
- Supports the Excellence detector base locking option to prevent unauthorised removal of the Excellence series detector
- Standard Excellence series base already integrated
- Hides the legacy base for perfect colour matching to the new Excellence series detector
- Supports Excellence series address tags for neat labelling and device identification
- EN54 approved with the Excellence series detectors

KE-DBA-ADPW-ZIT

Intelligent addressable base accessory - Ziton adapter (White)

Spécifications techniques

Général

Compatibilité	Ziton ZP7-SB1 standard detector bases
Connectivité	No wiring changes required

Caractéristiques physiques

Dimensions physiques	120.5 x 32.5 mm (Ø x h)
Poids net	80 g
Couleur	Blanc (RAL 9016)
Type de montage	Assemblage sur socle
Matériel (boîte)	PC / ABS

Environnement


Protégé contre le vandalisme	Non
Température de fonctionnement	−10 to +65°C
Température de stockage	−30 to +75°C
Humidité relative	10 to 93% (noncondensing)
Environnement	Intérieur

Régulateur

Conformité	CE, REACH, RoHS 3, UKCA, WEEE
Certification	CE

Produits compatibles

Catégorie	Référence	Description
Module de détection	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)
Module de détection	KE-DP3020W	
Module de détection	KE-DP3021W	
Module de détection	KE-DT3001W-HAB	

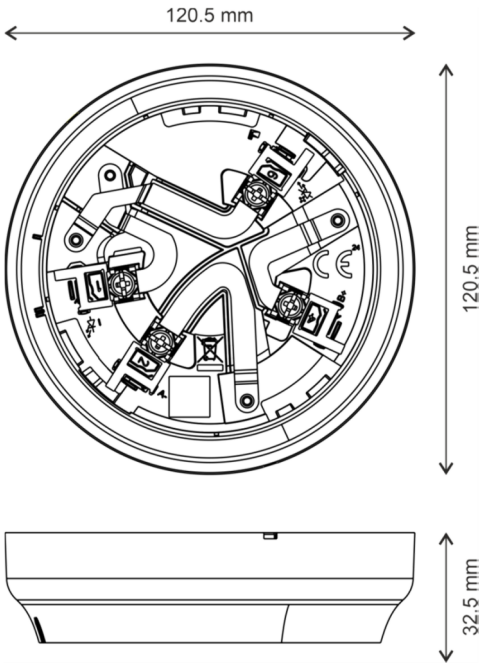

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 2 June 2026 - 16:04