KE-DBA-IPW

Intelligent addressable base accessory - weatherproof base (white)

General

The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it's a perfect match for exceptional overall performance.

The KE-DBA-IPW is an Excellence series, surface mount base accessory. It allows loop cabling to be installed in wet environments by allowing the use of cable glands to seal the cable entry into the base from water ingress via the cables. Four entry points are provided on the wall of the base to accommodate side entry glands. Rear cable entry into the base is also available with two similar cable gland knockouts.

Installation

The conduit entry points are conveniently supplied with breakouts and drill locations to facilitate either installation method.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.



Détails

- Dual rear cable entry with gland support and ample space for cables
- Cable gland support to prevent water ingress on 4 sides
- Drill location support for cable entry makes installation easy
- External screw fixtures reduces risk of water ingress
- Dual address tag locations avoids alignment to make tags visible
- Supports standard Excellence series bases without feature loss, all base features remain usable
- Supports access to the selectable detector locking mechanism that protects against unauthorized detector removal

KE-DBA-IPW

Intelligent addressable base accessory - weatherproof base (white)

Spécifications techniques

Général

Compatibilité	Excellence series bases

Caractéristiques physiques

Dimensions physiques	104 x 57 mm (Ø x D)
Poids net	165 g
Couleur	Blanc (RAL 9016)
Type de montage	Montage au plafond
Entrées de câble	6 (2 off rear, 4 off side 25 mm (Ø))
Matériel (boîte)	ABS moulé

Environnement


Protégé contre le vandalisme	Non
Température de fonctionnement	-30 to +85°C
Humidité relative	20 to 95% noncondensing
Environnement	Intérieur

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	CE

Produits compatibles

Catégorie	Référence	Description
Module de détection	KE-DB3010W	
Module de détection	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)

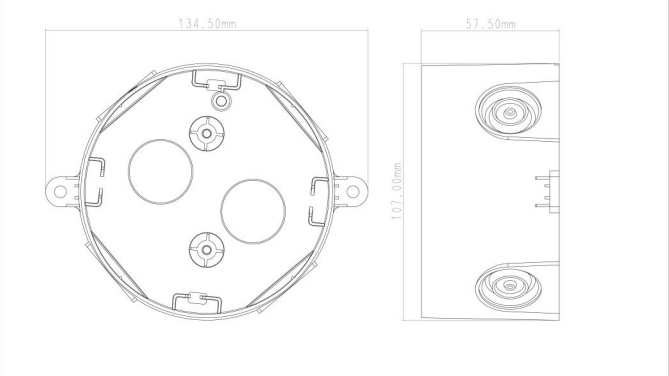

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 2 June 2026 - 16:04