KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

General


The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it’s a perfect match for exceptional overall performance.

The KE-DBA-RECW is an Excellence series, recess mount base accessory. It allows Excellence series detectors to be semi- recess mounted into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

Inatallation

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is automatically clamped between a retaining flange on the underside of the base moulding.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.

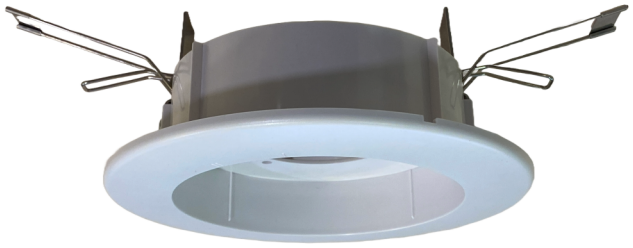

Détails

- Easy to install with standard tile clips avoids any drilling
- Enhances the detector low profile for aesthetically sensitive installations
- Supports standard Excellence series bases without any feature loss
- Integrated trim skirt covers any uneven hole sides
- Dual address tag locations avoids base alignment to make tags visible

KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

Spécifications techniques

Général

Compatibilité	Excellence series bases

Caractéristiques physiques

Dimensions physiques	138 x 38 mm (Ø x H)
Poids net	110 g
Couleur	Blanc (RAL 9016)
Type de montage	Montage au plafond, Montage encastré
Entrées de câble	1
Matériel (boîte)	ABS moulé

Environnement

Protégé contre le vandalisme	Non
Température de fonctionnement	-10 to 75°C
Humidité relative	0 to 95% noncondensing
Environnement	Intérieur
Indice de protection	IP42

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	CE
Environnement	EN60529

Produits compatibles

Catégorie	Référence	Description
Module de détection	KE-DB3010W	
Module de détection	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 2 June 2026 - 16:04