N-MC-BB-U

MCP accessory, intelligent manual call point back box, blue


General

The N-MC-BB-U is a surface mount back-box for for DM3000, KAL750 and ZP780 series manual call points. It offers cable entry from behind when used with hidden cable trunking, or cable entry from the top and bottom when surface mount cable trunking is used. Suitable mounting screws to fit the compatible manual call point to the back box are conveniently housed in the base of the box. A screen connection terminal is provided for convenient cable screen connection when used in electricity noisy environments.

Easy to install

Adjustable screw mounting holes allows for perfect alignment of the back box even if the drilled holes are not exactly level. The flexibility of cable entry from the large opening in the rear, or the dust proof knockouts at the top and bottom of the unit greatly enhances the applications possible for fitting in all types of installations. The back box may be rotated through 180° to position the selected entry orientation in the most convenient location at the top or the bottom of the unit.

A perfect fit between the back box and the manual call point front is guaranteed by device alignment guides that avoid misalignment of the back box with the front part, presenting the manual call point as a single aesthetic product on the wall.

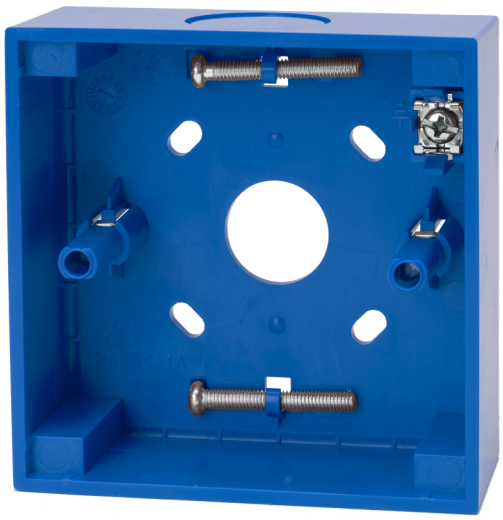

Détails

- Compatible with quality wall boxes and MCPs
- Rear and side cable entry using a single unit
- Suitable screws provided for MCP fitting
- Screen connection terminal for electrically noisy installations
- Alignment holes for wall mounting allows for perfect horizontal alignment
- Aligns perfectly with the NC-MC series conventional, as well as DM3000, KAL750 and ZP780 series addressable MCPs to provide a smooth aesthetic single unit finish

N-MC-BB-U

MCP accessory, intelligent manual call point back box, blue

Spécifications techniques

Général

Compatibilité	Excellence, NC & Ziton series MCPs

Électrique

Bornes	1 (cable screen)

Caractéristiques physiques

Dimensions physiques	87.1 x 87.1 x 35 mm (W x H x D)
Poids net	60 g
Couleur	Bleu (RAL 5005)
Type de montage	Fixation murale
Entrées de câble	3 side, 1 rear
Matériel (boîte)	Noryl SE100 (auto-extinguible)

Environnement

Protégé contre le vandalisme	Non
Température de fonctionnement	−25 to +72°C
Température de stockage	−25 to +72°C
Humidité relative	10 to 95% noncondensing
Environnement	Intérieur

Régulateur

Conformité	REACH, RoHS 2, WEEE

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 25 March 2026 - 14:59