NC-DPH-W

Conventional heat detector (white)

General

The NC-DPH-W is a configurable conventional rate-of- rise or fixed temperature heat detector.

Application

The detector supports installation on the NC-DB-W conventional detector base for standard applications, or the NC-DBD-W diode base when head-out functionality to BS5839 standard is required. Detection sensitivities are programmable using the NC-D-PT device programmer.



Détails

- Self-diagnostic
- Local test activation with reed switch
- All round LED visibility (360° viewing angle) avoids time spent on specific detector orientation
- Configurable polling LED support
- Remote indicator output
- 3 Programmable operating levels (A1R, A2S and BS)

NC-DPH-W
Conventional heat detector (white)

Spécifications techniques

Général

Indication d'état	Red LED
Interface utilisateur	Via LED - polling, fault, contamination and alarm
Compatibilité	GST100A Series conventional CIEs as well as GST I-9319 Zone Monitor
Tension de réenclenchement	< 1 VDC
Réinitialiser l'heure	<10 s
Niveaux d'alarme	3
Connectivité	Zone connection - 2-core (polarity sensitive), RI connection - 2-core (polarity sensitive)

Électrique

Tension de fonctionnement	9.5 to 28 VDC (24 VDC typical)
Consommation de courant	<60 µA (Quiescent) ≤55 mA (Alarm)
Spécification du câble	>1.0 mm²
Nbre de fils conducteur	2
Bornes	4

Détection

Principe de détection	Heat
Sensibilité	Programmable
Longueur de la zone	Panel dependent

Sortie

Remote alarm output	1

Caractéristiques physiques

Dimensions physiques	54.5 mm (including base) x 100 mm Ø
Poids net	±110 g
Couleur	Blanc (RAL 9016)
Type de montage	Montage au plafond
Matériel (boîte)	ABS

Environnement


Protégé contre le vandalisme	Non
Température de fonctionnement	-10 to +65°C
Humidité relative	0 to 95% noncondensing
Environnement	Intérieur
Indice de protection	IP2x

Régulateur

Conformité	CE, WEEE
Certification	EN54-5
Voluntary marks	BOSEC
Normes	LPCB

Produits compatibles

Catégorie	Référence	Description
Module de détection	NC-D-PT	
Module de détection	NC-DB-W	
Module de détection	NC-DB2R-W	
Module de détection	NC-DBD-W	
Module de détection	NC-DBR-W	
Module de notification	PA25/3L	PA25 Series Remote Indicator

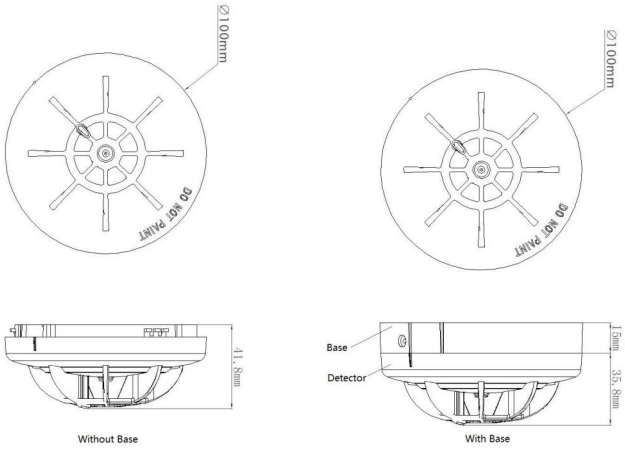

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 13:29