NP-25

Device Suspension Bracket, 25Cm

General

The NP series brackets provide an easy and suitable mounting platform solution for the installation of detection points away for the ceiling when direct mounting on the ceiling is not desired or permissible. The NP-25 antistatic and corrosion-proof glass fibre and polyester bracket offers a suitable installation platform for point detectors for requirements of ceiling heights between 6 and 14 m.

Application

Detector placement in areas with high, flat or nearly flat roofs may in some cases require that the detector is not mounted flat on the ceiling itself to overcome air pockets preventing fire phenomena such as smoke or heat from reaching the detector. The NP series brackets distance the detector from the ceiling allowing these phenomena to reach the detection point more easily.

Recommended Practises

The table from the Swedish Fire Association (norm SBF 110:6) is included below, indicating the required distance that the detector needs to be away from the ceiling in relation to the ceiling height.

Optional

For additional extention the R-100 extends the range to 100cm.



Détails

- Easy to install
- Anti-static and corrosion proof
- Overcomes air pocketing and buffeting effects on flat ceilings

NP-25
Device Suspension Bracket, 25Cm

Spécifications techniques

Caractéristiques physiques


Dimensions physiques	250 x 97 mm
Poids net	280 g
Matériel (boîte)	Fibre de verre, Polyester


Environnement

Environnement	Intérieur

Régulateur

Normes	UL94 (Fire Resistance)

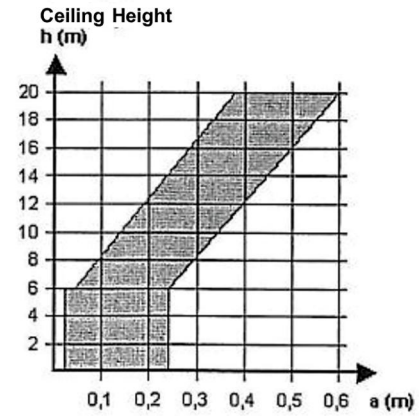



KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 27 September 2024 - 11:14