NS3552-8P-2S-V2

8 + 2 industrial Gigabit, Managed PoE+ switch

Product overview

The IFS® NS3552-8P-2S-V2 is an Industrial Gigabit PoE+Managed Switch equipped with 8 x 10/100/1000Mbps RJ45 ports with PoE+ (30 W) capabilities and two 100/1000Mbps SFP (fiber) uplink ports. These are fully managed Layer 2+ switches providing a robust industrial hardened design that provides for rapid operational recovery in the event of a network or power system failure.

Management in TruVision® Navigator

The NS3552-8P-2S-V2 simplifies management of your IP video system by providing integration into TruVision Navigator 8.0 and above.

The NS3552-8P-2S-V2 can provide information to TruVision Navigator such as ONVIF lables of cameras, bandwidth usage per port and POE power control making installation and management IP Video systems simpler and effortless.

Robust hardened design

With an IP-30 rated enclosure, IFS Industrial Gigabit Managed Switches provide a high level of immunity against electromagnetic (EMI) and radio-frequency (RFI) interference typically found in industrial environments. This series of switches comply with IEC60068-2-xx standards for free-fall, shock, and vibration and operate in -40 to 75°C temperatures found in difficult environments such as plant floors or in curbside traffic control cabinets.

Industrial-grade network redundancy and recovery

These switches not only incorporate the industry standard Rapid Spanning Tree Protocol (IEEE 802.1w RSTP), but also an advanced Industrial Fail-Safe (IFS) technology accommodating multiple redundant ring topologies and improved network recovery time of less than 20 ms. The switches incorporate a redundant power supply system to further enhance network reliability and uptime. Ideal for use in implementing highly fault-tolerant ring and mesh network architectures, these switches are well suited for harsh environments such as industrial security, factory automation and intelligent transportation systems (ITS).



Détails

- 8-port 10/100/1000Base-T with PoE+
- 2-ports SFP (fiber) 100/1000Base-X
- Full support in TruVision Navigator 8 and above
- High-performance Switch Architecture
- Up to 20 Gbps non-blocking switch fabric
- 9K bytes Jumbo frame support
- 8K MAC address table, automatic source address learning and ageing
- IGMP (v1/v2/V3) Snooping, up to 255 multicast Groups with IGMP Querier mode support, and MLD (v1/v2) Snooping, up to 255 multicast Groups with MLD Querier mode support
- VLAN Support - up to 255 VLANs groups out of 4094 VLAN IDs, MVR (Multicast VLAN Registration), Voice VLAN, MAC-Based VLAN, Protocol-Based VLAN
- Quality of Service (QoS), 802.1p priority, 802.1Q VLAN tag, DSCP/TOS field in IP Packet
- IEEE 802.3ad LACP / Static Trunk, Supports 5 groups of 8-Port trunk support
- Advanced Security
- MAC Filtering and Source IP/MAC address port-binding
- Complies with IEEE 802.3af / IEEE 802.3at Power over Ethernet / End-Span PSE and up to 8 IEEE 802.3af / 802.3at devices powered
- Circuit protection prevent power interference between ports
- Robust Hardened Design
- IP30 metal enclosure, DIN Rail and Wall Mount Design
- Wide operating temperature range of -40 to +75°C

NS3552-8P-2S-V2

8 + 2 industrial Gigabit, Managed PoE+ switch

Spécifications techniques

Général

Fast ring	Oui (ERPS)
Contrôle orage	Broadcast, Multicast, Unicast
Sécurité	802.1x, ACL, RADIUS, Source MAC / IP address binding, TACACS+
Recherche DHCP	Oui
Sortie relais défaut	Yes, with 2x digital inputs and <n>2x digital outputs

Catégorie

Catégorie	Industriel
Gestion	Géré
Géré	Oui
PoE	Oui

Ports physiques

Nombre de ports	8
Type de port	Gig
Vitesse	Gigabit
PoE / PoE+	8 port PoE/8 port PoE+
Port fibre	2
Prise en charge SFP	Série S20/S25, Série S30/S35
Vitesse SFP	100/1000

Performances des commutateurs

Structure de commutation	20 Gbps
Débit (Mpps)	14.88
Table MAC	8 K
Jumbo frame support	9 K

Fonctions de la couche 2

Interface de gestion	Console, Web, Telnet, SNMP 1,2,3, SSH/SSL secure access
Surveillance IGMP	255 Group, Snooping v1, v2, v3
Requête IGMP	Qui
VLAN, QoS	256, yes
Liste de contrôle d'accès	123 entries

Électrique

Budget d’alimentation PoE	260 W
Alimentation redondante	Oui
Type de bloc d’alimentation	12 à 48 VCC
Consommation électrique	320 W

Caractéristiques physiques

Dimensions physiques	152 x 107 x 72 mm 6 x 4.21 x 2.83 in.
Poids net	1.684 kg
Couleur	Noir
Matériel	Métal
Type de montage	Rail DIN, Fixation murale
Empilable	Non

Environnement

Température de fonctionnement	-40 to +75°C
Température de stockage	-40 to -85°C
Humidité relative	0 to 95% noncondensing
Environnement	Intérieur
Indice de protection	IP30

Régulateur

Normes IEC	IEC60068-2-27 (shock), IEC60068-2-32 (free fall), IEC60068-2-6 (vibration)

Physical ports

10/100/1000Base-T Ports	8 RJ-45 ports
SFP/Mini-GBIC Slots	2 SFP/Mini-GBIC Slots - 100Base-FX/BX/LX and 1000Base- SX/BX/LX/LHX/ZX SFP transceiver compatible
Port Configuration	Auto MDI/MDI-X
Port Speed	Auto-negotiate

Switch performance

Switch Architecture	Store-and-Forward
Switch Fabric	20 Gbps non-blocking
Switch Throughput	14.8 Mpps @64 bytes
Mac Address Table	8K entries
Share Data Buffer	4 Mbit
Jumbo Frame Size	9 Kbyte
Flow Control	Back pressure for Half-Duplex, IEEE 802.3x Pause Frame for Full-Duplex

NS3552-8P-2S-V2

8 + 2 industrial Gigabit, Managed PoE+ switch

Layer 2 Functions

Management Interface	Console, Telnet, SSH, SSL, Web Browser, SNMPv1, v2c and v3
Port Configuration	Port enable/disable; Auto-negotiation; 10/100/1000 Mbps full and half duplex mode selection; Flow Control enable/disable; Bandwidth control on each port
Port Status	Display each port's: speed duplex mode, link status, flow control status, Auto negotiation status, trunk status
Port Mirroring	TX/RX/Both; 1 to 1 monitoring
Bandwidth Control	Bandwidth control per port: Ingress: 500 Kb to1000 Mbps, Egress: 500 KB to 1000 Mbps
VLAN	IEEE 802.1q tagged-based VLAN; Port-based VLAN; Q-in-Q tunneling; Up to 255 VLANs groups; Private VLAN, MAC-Based VLAN, Protocol-Based VLAN, Voice VLAN, MVR (Multicast VLAN Registration)
Link Aggregation	IEEE 802.3ad LACP / Static Trunk, Supports 5 groups of 8-Port trunk support
Quality of Service (QoS)	Traffic classification based, Strict priority and WRR; 8-level priority for switching - Port Number - 802.1p priority - 802.1Q VLAN tag - DS/TOS field in IP Packet
Multicasting/IGMP	IGMP (v1/v2/V3) Snooping, up to 255 multicast Groups with IGMP Querier mode support, MLD (v1/v2) Snooping, up to 255 multicast Groups with MLD Querier mode support
Access Control List	IP-Based ACL/MAC-Based ACL 256 entries
SNMP MIBs	RFC-1213 MIB-II; IF-MIB; RFC-1493 Bridge MIB; RFC-1643 Ethernet MIB; RFC-2863 Interface MIB; RFC-2665 Ether-Like MIB; RFC-2737 Entity MIB; RFC-2618 RADIUS Client MIB; RFC-2933 IGMP-STD-MIB; RFC3411 SNMP-Frameworks-MIB; IEEE802.1X PAE; LLDP; MAU-MIB
IEEE PoE Standard	IEEE 802.3af/IEEE 802.3at Power over Ethernet/PSE
Maximum Devices	8
Output Power (per-port)	Per Port 56 VDC, 350 mA. Max. 15.4 W (IEEE 802.3af), Per Port 56 VDC, 590 mA. Max. 30 W (IEEE 802.3at)

LED Indicators & Switch

Power	On/Green
10/100/1000Base-T Ports	10/100/1000 LNK/ACT - Green
100/1000 Base-X/SFP Ports	100 LNK/ACT - Green; 1000 LNK/ACT - Green
FAN(s)	Alarm/Green
Reset Button	System reboot: push and hold <5 sec.; Factory Default: push and hold > 5 sec.

Electrical & Mechanical

Power Input 1	48 VDC
Power Input 2	48 VDC
Electrical Fast Transient (EFT)Protection	6 kVDC
Power and Alarm FaultConnector	6-pin removable screw terminal
Alarm Fault Relay	1 A @ 24 VDC

Regulatory


Regulatory Standards	FCC Part 15 Class A, CE
IEEE Standards (1)	IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX/100Base-FX; IEEE 802.3z Gigabit SXBX/LX/LHX/ZX; IEEE 802.3ab Gigabit 1000T; IEEE 802.3x Flow Control and Back pressure;IEEE 802.3ad Port trunk with LACP; IEEE 802.1d Spanning tree protocol
IEEE Standards (2)	IEEE 802.1w Rapid spanning tree protocol; IEEE 802.1s Multiple spanning tree protocol; IEEE 802.1p Class of service; IEEE 802.1Q VLAN TaggingIEEE 802.1x Port Authentication Network Control; IEEE 802.1ab LLDP
RFC Standards	RFC 768 UDP, RFC 793 TFTP, RFC 791 IP, RFC 792 ICMP, RFC 2068 HTTP, RFC 1112 IGMP Version 1, RFC 2236 IGMP Version 2
IEC Standards	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)

Accessories

SFP (100 Mbps)	S25 Series (wide-temp)
SFP (1000 Mbps)	S35 Series (wide-temp)

Produits compatibles

Catégorie	Référence	Description
Alimentations	PS48VDC480W-DIN	48VDC 480W POWER SUPPLY WITH DIN RAIL MOUNT

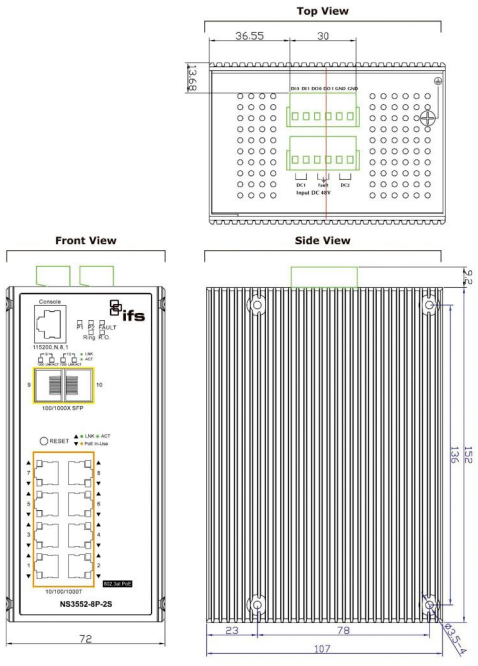

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 16 June 2026 - 15:24