
RK100-N

Bolt contact for mounting on interior doors

The bolt contact is suitable for mounting at the door closing plate to allow the lock detection of the corresponding lock device. This product is only to be used for indoor applications. The activation/operation of the bolt contact is triggered by the lock bolt. The status of the bolt contact can be processed by the central unit of an intruder and hold-up system.

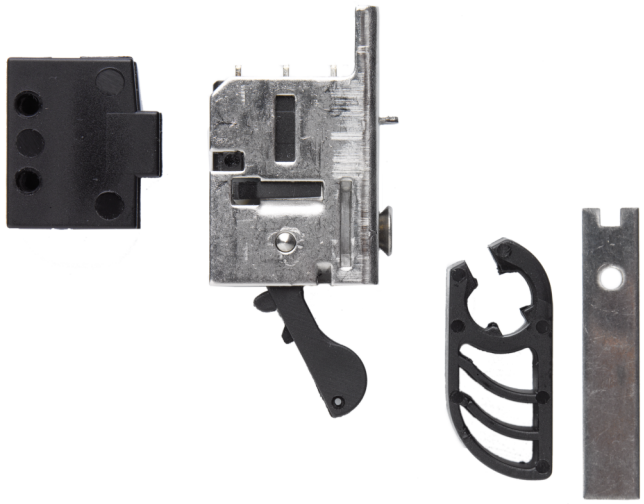

Détails

- For mounting on interior doors
- IP50
- VdS Class C certified
- 2,5 years warranty

RK100-N

Bolt contact for mounting on interior doors

Spécifications techniques

Général

Groupe d'accessoires	Accessoires pour serrures de portes
Type	Pièce de rechange

Électrique

Tension de fonctionnement	max. 30 VDC (switch voltage)
Consommation de courant	min. 5 mA, max. 300 mA (switch current)

Environnement

Température de fonctionnement	-25 to +70°C (at fixed cable) -5 to +50°C (at moveable cable)
Environnement	Intérieur
Indice de protection	IP50

Régulateur

Certification	VdS

Contact

Termination	3 soldered terminals
Capacity	Max. 3 W/VA
Type	Change over

Switch Point

	Adjustable
Cycles of operation	min. 30.000

Regulatory

Security approvals	VdS Class II

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 14 July 2026 - 14:37