
TCA-0066

Dual galvanic ISO IS EEx ia IIC

Function

This isolated barrier is used for intrinsic safety applications. It supplies power to solenoids, LEDs, and audible alarms located in a hazardous area.
It is loop powered, so the available energy at the output is received from the input signal. The output signal has a resistive characteristic. As a result the output voltage and current are dependent on the load and the input voltage.
At full load, 10 V at 45 mA is available for the hazardous area application.

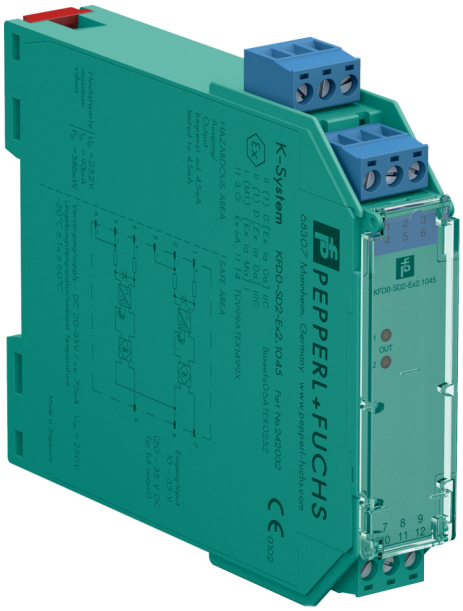

Détails

- 2-channel isolated barrier

TCA-0066
Dual galvanic ISO IS EEx ia IIC

Spécifications techniques

Électrique

Type de bloc d’alimentation	24 VDC

Caractéristiques physiques

Type de montage	Rail DIN

Régulateur

Certification	UL
Normes	IEC/EN 61508

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 8 November 2024 - 11:53