
UC-140(SW)

UltraSync Communicator with 4G/2G single path suitable for Intrusion panels with ultrasync private APN SIM card

Overview

UC-140 (SW) UltraSync Communicator is a single path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

• We've designed our new, affordable, wireless alarm signaling system with you and your customers in mind.
• Ideal for low to medium risk requirements.
• It's our smallest unit yet, and with simple push-button setup, it can be up and running in no time.
• This single-path alarm signaling unit can use any of the main EU mobile networks to transmit alarm signals over 4G or 2G.
• EN50131 Grade 2 and EN50136 certified.

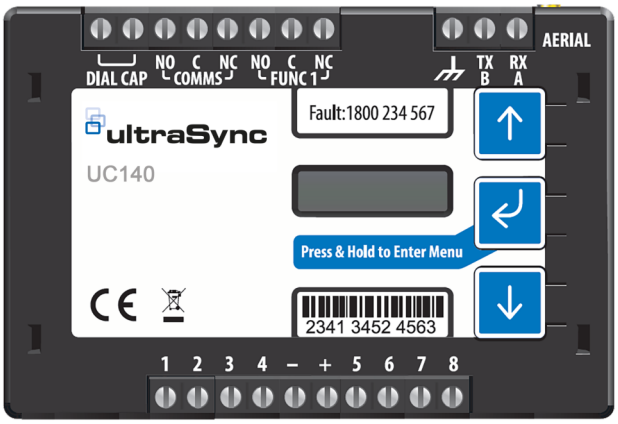

Alarm panel interfaces

• 8 general purpose alarm inputs (Logic High = +2V to +30V/Logic Low = <1.3V)
• 2 relay outputs
• Unconnected state: Logic Low
• Standard screw terminals
• Programmable function output-for remote control of site devices
• Line fault output-for status indication at site of alarm signalling path
• Dial Capture with phone line simulation
• Onboard RS232 or RS485 for direct panel interface to some panels

Dial Capture features

• Converts dialler alarm systems into high security signalling devices
• Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

Configuration

• Simple single push button pin learn
• iOS and Android installer app
• Using on board menu driven by push buttons

Détails

- UltraSync Communicator with 4G/2G single path suitable for Intrusion panels with ultrasync private APN SIM card

UC-140(SW)

UltraSync Communicator with 4G/2G single path suitable for Intrusion panels with ultrasync private APN SIM card

Spécifications techniques

Général

Gamme de produits	UltraSync

Réseau

Type de communicateur	2G, 4G, Cellular
Fréquence GSM	LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS Dual band (900/1800 MHz)

Rapport

Rapport de protocoles	Contact ID, SIA
Récepteurs pris en charge	UltraConnect

Interfaces

Ethernet	---
Antenne	Yes, included

Entrée / sortie

Entrées	8 general purpose alarm inputs
Sorties	2 relay outputs

Électrique

Tension de fonctionnement	9.5 to 30 VDC
Consommation de courant	70mA @12 VDC

Caractéristiques physiques

Dimensions physiques	95 x 67 x 17 mm
Couleur	Noir

Environnement

Température de fonctionnement	-10°C to +55°C
Humidité relative	5 to 75%
Environnement	EN50130-5 ; Classe II - Intérieur (général)

Régulateur

Certification	EN50131 Grade 2, EN50136

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 16 June 2026 - 15:22