
W76323

Active Infra-Red Mini Barrier for (outdoor) protection of doors and windows, height 2.0m, range up to 6m, Black

Overview

The WINGUARD infrared mini-barriers are unobtrusive multiinfrared transmitter/receiver units housed in robust aluminium housings, which are one and two metres high respectively. With their 6 metre range, they are ideal for outdoor perimeter protection of windows and doors. The small dimensions of the the Tx and Rx units (only 23mm wide), makes them suitable for installation just on the outside of windows and doors. Both transmitter and receiver are supplied with approximately 2 metre screen cable to simplify installation. Winguard are fitted with 4 twin active infrared beams, which are syncronized and controlled by a microprocessor. The alarm is activated when one of the beams is obscurated by an object with at least a 10mm diameter for a duration of 90 milliseconds.

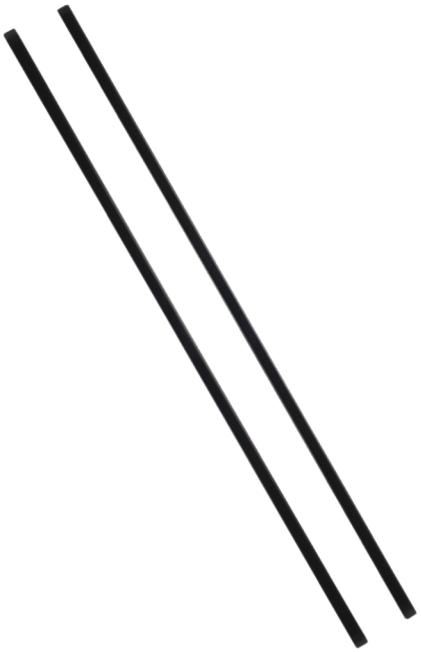

W76323

Active Infra-Red Mini Barrier for (outdoor) protection of doors and windows, height 2.0m, range up to 6m, Black

Spécifications techniques

Général

Catégorie	Rayons Infrarouges Actifs
Type de produit	Rayon infrarouge actif
Système infrarouge	four 7-twin active infrared beams

Détection

Gamme	up to 6 m (height 2.0 m)

Électrique

Tension de fonctionnement	11.5 to 14.5 VDC
Consommation de courant	40 mA - 90 mA

Caractéristiques physiques

Dimensions physiques	2110 x 24 x 21 mm
Poids net	1800 g
Couleur	Noir

Environnement

Température de fonctionnement	-20 to 50°C
Indice de protection	IP55

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 14:33