
ZE2016

Extension à LED, 16 zones incendie/défaut

General

The ZE2016 allows the extension of the visible zone indications of the FP2864 and FR2064 fire panels and repeaters by 16 additional zones.

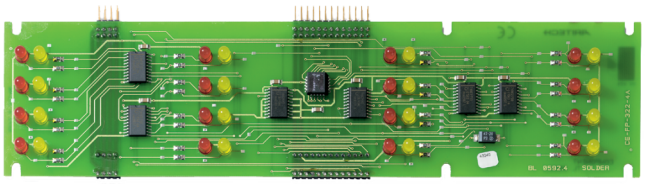

Détails

- Extends the visual zone LED display by 16
- Provides fire and fault LEDs for every zone
- No configuration required
- Supplied with nuts and washers for easy installation

ZE2016

Extension à LED, 16 zones incendie/défaut

Spécifications techniques

Électrique

Consommation de courant	8 mA

Caractéristiques physiques

Types de format	Moyenne
Dimensions physiques	267 x 64 mm
Poids net	70 g

Environnement

Température de fonctionnement	-10 to +50°C
Température de stockage	-10 to +70°C
Humidité relative	10 to 95%

Régulateur

Certification	EN54-2

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 1 September 2025 - 11:04