
ZE2064

Extension à LED 64 zones incendie/défaut (pour FRG20xxx)

General

The ZE2064 allows the extension of the visible zone indications of the FP28255 and FR20255 fire panels and repeaters by 64 additional zones.

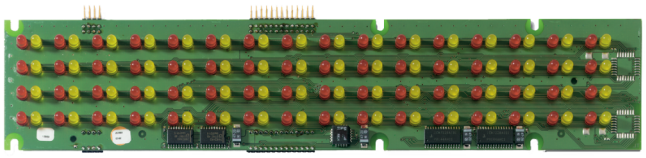

Détails

- Extends the visual zone LED display by 64
- Provides fire and fault LEDs for every zone
- No configuration required
- Supplied with nuts and washers for easy installation

ZE2064

Extension à LED 64 zones incendie/défaut (pour FRG20xxx)

Spécifications techniques

Caractéristiques physiques

Types de format	Moyenne

Régulateur

Certification	EN54-2

Electrical

Current consumption	14 mA

Environmental

Storage temperature	-10°C to +70°C
Operating temperature	-10°C to +50°C
Relative humidity	10% to 95%

Physical

Dimensions	314 x 64 mm
Weight	120 g

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 1 September 2025 - 11:04