




ATS1500A-MM-HK

Centrale bus Advisor Advanced ATS1500A coffret métal, 8-32 zones, 4 groupes, alimentation 1 A, transmetteur digital intégré + 1 clavier ATS1135, 2 x 16 caractères LCD, lecteur Prox.

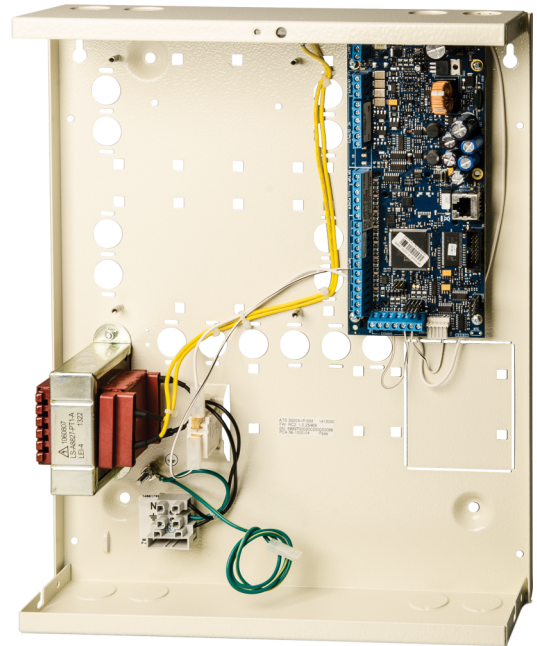

Détails

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: language configurable per user
- IP alarm reporting to OH-NETREC receiver - Optional GPRS
- Integrated access control & support for ATS125x door controller

ATS1500A-MM-HK

Centrale bus Advisor Advanced ATS1500A coffret métal, 8-32 zones, 4 groupes, alimentation 1 A, transmetteur digital intégré + 1 clavier ATS1135, 2 x 16 caractères LCD, lecteur Prox.

Spécifications techniques

Systeme

Product line	Advisor Advanced
Product type	Contrôle d'accès intégré
Panel type	Hybride
Kit	Oui
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54 or equivalent

Entrées

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Sorties

No. of outputs	128
No. of onboard outputs	5

Zone

No. of areas	4
--------------	---

Utilisateur / cartes

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Contrôle d'accès

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	PSTN
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP
Databus type	RS485

Journal des événements

Alarm event log	14500
Journal des événements d'accès	10000

Électrique

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50/60 Hz
Mainboard current consumption	150 mA
Max system current	1000 mA
Max aux power current	750 mA (depends on backup power needs)
Auto-reset fuses	5
Glass break fuses	1 (mains power)

Caractéristiques physiques

Physical dimensions	315 x 388 x 85 mm
Material	Acier (peint)
Housing	Format moyen métal

Environnement

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP30

Régulateur

EN50131 Grade	Grade 3, avec kit sabotage
Compliance	CE