



POE304-EX-4P

POE-bt to Gigabit Ethernet 4-port PoE+ Extender

Overview

The IFS POE304-EX-4P is remotely powered via Ethernet cable from either the IFS POE304-MS injector or IFS NS3503-16P-4C PoE-Ultra Network Switch eliminating the need for local power requirements. The POE304-EX-4P can then transmit up to 4-ports of Ethernet data and PoE-af/at power dependent on the Powered Devices (PD) power demand.

The IFS PoE-Ultra Solution facilitates easier network planning by eliminating restrictions of edge device placement near AC power outlets and reducing the need for AC wiring and installation costs.



Détails

- 4-Port PoE+ Switch powered by 1 x PoE-bt input
- Up to 55 watts shared PoE power
- Plug-and-play self-powered design
- Can be used with an IFS PoE-Ultra Injector or other PoE-Ultra compliant PSE equipment
- Supports 10/100/1000Base-T Ethernet
- Auto-detect of PoE equipment providing protection from incorrect installation
- Current overload detection
- LED Indicators for PoE In, PoE Out, Data
- Can be daisy-chained to extend data and PoE on a single network cable a maximum of 300m.

POE304-EX-4P

POE-bt to Gigabit Ethernet 4-port PoE+ Extender

Spécifications techniques

Général

Catégorie	Prolongateur PoE
Type de port	10/100/1000
Vitesse du Port	Gigabit

Électrique

Consommation électrique	60 W
-------------------------	------

Caractéristiques physiques

Dimensions physiques	56 x 87 x 135 mm
Poids net	715 g
Matériel	Métal

Environnement

Température de fonctionnement	-40 to +75°C
Température de stockage	-40 to +85°C

Ethernet

Max Throughput (packet per second)	7.44Mpps at 64 Bytes
IEEE Standards	IEEE 802.3 Ethernet / IEEE 802.3u Fast Ethernet / IEEE 802.3ab Gigabit Ethernet
Latency	1765 ns (at 64 Byte Frame)
Maximum Frame Size	9 Kbytes
EIA/TIA-568 Standards	Category 5/5e cable

Power Over Ethernet (PoE)

PoE Standard	IEEE 802.3at High Power over Ethernet PSE / Mid-Span / IEEE 802.2at High Power over Ethernet PD / Mid-Span
PoE Power Supply Type	POE-bt (No external power adaptor required)
PoE Output Pin Assignment	4/5(+), 7/8(-)
PoE Output Power with Multiple Extenders	4 x POE-af/at per port, 50 W max. shared power budget.

Connectors & Indicators

Ethernet + PoE In	1 x RJ-45 connector
Ethernet + PoE Out	4 x RJ-45 connector
LED Indicator	PWR (Green), PoE Power In (Mid-Span/End-Span - 2 x Green), PoE Power Meter (3 x Green), Input Port - LNC/ACT (Green) PoE (Amber), Per Port Output - LNC/ACT (Green) PoE (Amber)

Electrical & Mechanical


Input Power	Powered by POE-bt (PoE Switch or Mid-Span Injector)
Maximum Powered Devices	4
Power consumption	5 watts from PoE uplink

Environmental

MTBF	>50,000 hrs. @ 25°C
------	---------------------

Standards Compliance

Regulatory	FCC Part 15 Class A, CE
EMI	EN 55022 CLASS A / EN61000-3-2 / EN61000-3-3
EMS	EN 55024 / IEC 61000-4-2 / IEC 61000-4-3 / IEC 61000-4-4 / IEC 61000-4-5 / IEC 61000-4-6 / IEC 61000-4-8 / IEC 61000-4-11 / IEC/EN 60950-1

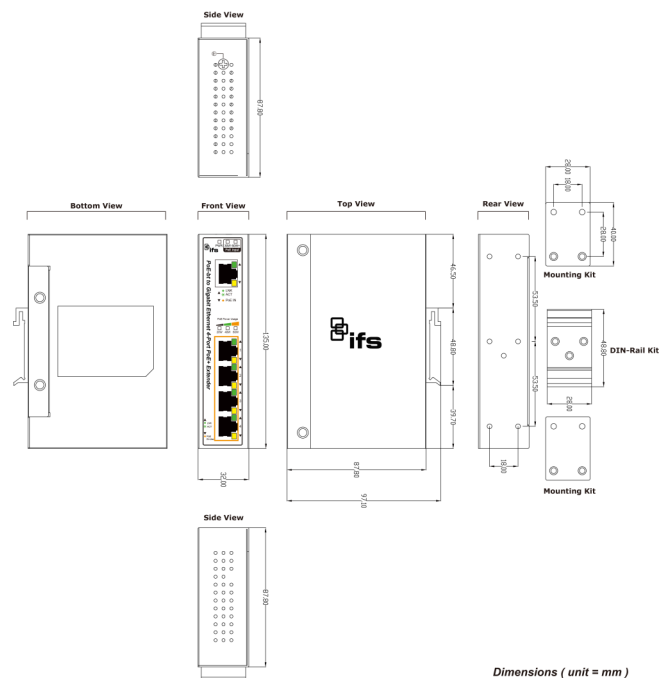

Dimensions (unit = mm)



En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web.fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 5 May 2023 - 10:28