

POE304-MS

Injecteur Gigabit Power over Ethernet (POE-bt)

Overview

The IFS® PoE-bt Ethernet Injector provides a quick and easy solution to PoE-bt power (60w) on Ethernet cable. Utilizing the Category Network cable, the injector remotely powers up to 60 watts up to 100 meters.

The IFS PoE-Ultra Solution facilitates easier network planning by eliminating restrictions of edge device placement near AC power outlets and reducing the need for AC wiring and installation costs.



Détails

- Plug-and-play design
- POE-bt (60 W)
- Supports 10/100/1000-TX Ethernet
- Auto-detect of PoE IEEE 802.3af, 802.3at and 802.3bt
- Current overload detect
- PoE Ready/In-use LED indicator
- Can deploy data and PoE on a single Category cable up to 100m (328 ft.) to a PoE powered (PD) edge device

POE304-MS

Injecteur Gigabit Power over Ethernet (POE-bt)

Spécifications techniques

Général

Catégorie	Injecteur PoE
Type de port	Copper (RJ45)
Vitesse du Port	Gigabit

Électrique

Consommation électrique	65 W
-------------------------	------

Caractéristiques physiques

Dimensions physiques	95 x 70 x 26 mm
Poids net	237 g
Matériel	Métal

Environnement

Température de fonctionnement	0 to +50°C
Température de stockage	-10 to 70°C
Humidité relative	5 to 90% noncondensing
Environnement	Intérieur

Ethernet

Throughput (packet per second)	148810 pps @ 64 Bytes
IEEE Standards	IEEE 802.3 10Base T / IEEE 802.3u 1000Base-TX / IEEE 802.3ab 1000Base-T / IEEE 802.3at PoE+
EIA/TIA-568 Standards	10 Base-T 2 pair UTP Cat 3,4,5 to 328ft (100m) 100 Base-TX 2 Pair UTP Cat 3,4,5,5e to 328Ft (100m) EIA/TIA-568 100 ohm STP (100 m)

Power Over Ethernet (PoE)

PoE Standard	IEEE 802.3af, at and POE-bt
PoE Output Voltage	54 VDC

Connectors & Indicators


Ethernet + DC Out	1 x RJ-45 connector (10/100/1000Base-TX with IEEE 802.3at PoE PSE for data + DC out)
Ethernet Data In	1 x RJ-45 connector (10/100/1000Base TX for data in)
DC Input	5.5 x 2.5 mm DC receptacle
LED Indicator	PWR (Green), POE-at (Mid-span/End Span - 2 x Green)

Electrical & Mechanical

Input Power	1 x DC Jack - 56 VDC @ 60 W
PoE Output Power	54 VDC, 60 W max.
Maximum Powered Devices	1

Produits compatibles

Catégorie	Référence	Description
Alimentations	PS54VDC72W-EU	Bloc alimentation sur prises EU Entrée: 100-240VAC / Sortie: 54VDC pour POE302-MS.
Alimentations	PS54VDC72W-UK	54VDC 72W Output Power Supply with UK wall plug

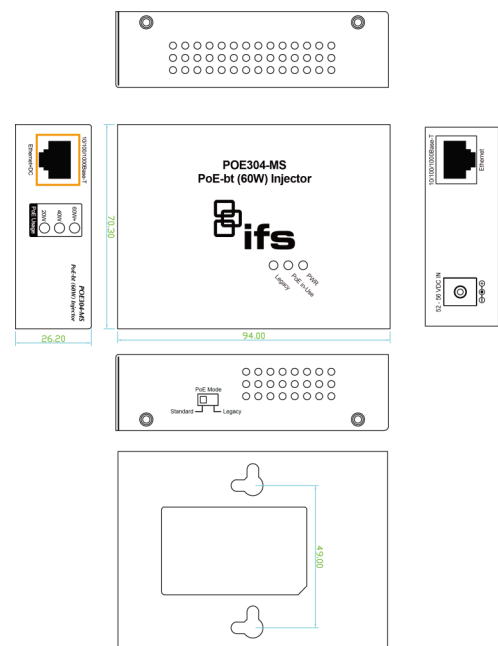

Dimensions (unit = mm)



En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 24 April 2024 - 17:20