1078-N

Recessed magnetic contact for steel doors, white

Steel door applications

The Sentrol 1078(C/T) series steel door contacts are designed specifically for use in the steel doors commonly found in commercial building applications. Many models including, wide gap, SPDT and biased for high security applications make the 1078 series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged body construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Dettagli

- Special design for steel mounting
- Self-lock mounting
- Rugged construction
- Comprehensive product range

1078-N

Recessed magnetic contact for steel doors, white

Specifiche tecniche

Generale

Tipo di applicazione	Montaggio ad incasso
Tipo contatto	NC
Connettività	30 cm wire leads

Cablato / senza fili

Cablato / senza fili	Cablato
Gap operativo	13 mm (max.)

Fisico

Dimensioni magnete	25 x 40 mm (Ø x L)
Dimensioni contatto/sensore	25 x 29 mm (Ø x L)
Colore	Bianco

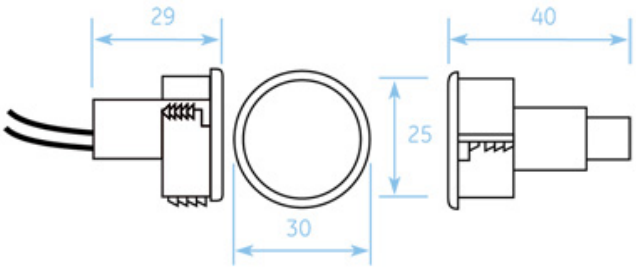

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 13 August 2026 - 11:05