

## 2X-F1-FB2-S-32

Addressable Fire Panel with Fire Brigade controls - 1 Loop small cabinet



# 2X-F1-FB2-S-32

## Addressable Fire Panel with Fire Brigade controls - 1 Loop small cabinet

### Specifiche tecniche

#### Generale

Maximum system capacity (device count) up to 8192

Network size (nodes) up to 64

#### Elettrico

Tipo di alimentatore VAC

#### Ciclo continuo

Maximum loop capacity 1

#### Zona

Maximum zone capacity up to 512

#### Fisico

Form factor Piccolo

Colour Grigio (RAL 7035)

Mounting type Montaggio a superficie


#### Ambientale

Ambiente Interno

#### Regolatorio

Compliance BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certification EN54-13, EN54-2, EN54-21, EN54-4, VdS

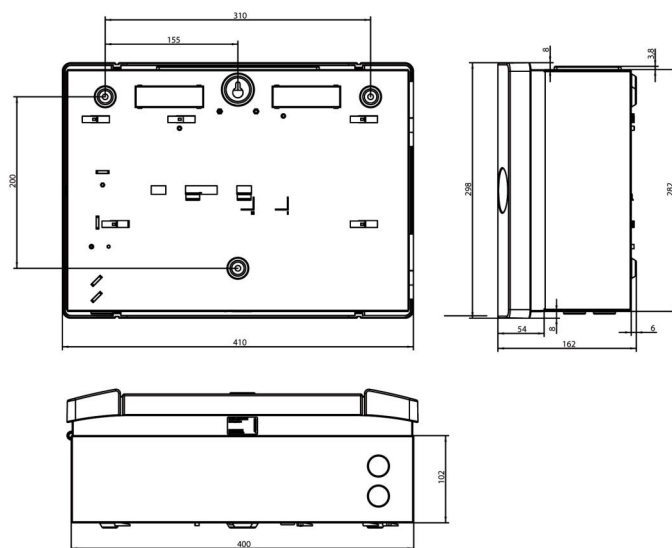

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita [it.firesecurityproducts.com](http://it.firesecurityproducts.com) online o contatta il tuo riferimento commerciale.

Last updated on 16 February 2024 - 12:24