

## 2X-F2-FB2-PRT-46

Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - German



# 2X-F2-FB2-PRT-46

## Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - German

### Specifiche tecniche

#### Generale

Maximum system capacity (device count) up to 32768

Network size (nodes) up to 64

#### Elettrico

Tipo di alimentatore VAC

#### Ciclo continuo

Maximum loop capacity 4

#### Zona

Maximum zone capacity up to 512

#### Fisico

Form factor Grande

Colour Grigio (RAL 7035)

Mounting type Montaggio a superficie


#### Ambientale

Ambiente Interno

#### Regolatorio

Compliance BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certification EN54-13, EN54-2, EN54-21, EN54-4, VdS

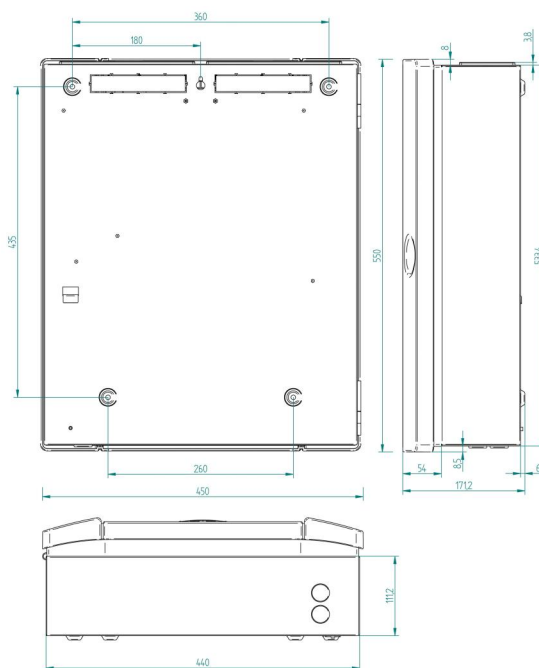

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita [it.firesecurityproducts.com](http://it.firesecurityproducts.com) online o contatta il tuo riferimento commerciale.

Last updated on 16 February 2024 - 12:24