

ATS3500A-MM-HK-4IN

Kit ATS3500A-MM che include una tastiera ATS1135 e 4xATS1210E

Intrusion Alarm System

Advisor Advanced is a full-blown security solution that is combining intrusion and access control together with state of the art connectivity solutions, satisfying a wide range of remote applications.

The product family has 3 variants and depending on the variant supporting between 32 and 512 zones that can be programmed over 4 to 64 independent areas. Zones may be assigned to a specific area (offices, stores,..) or common to all (reception, ..). Each area may have its separate User Interface.

The new Advisor Advanced product line is designed to be fully compliant with EN50131, Security grade 2 or, when ATS-MM-TK added, Security grade3.

Advisor Advanced product line

Advisor Advanced productline is a family of several types of control panels (ATSx500A) that have the same software, menu structure and basic methods of interacting with users. Using existing ATS accessories, such as keypads, readers and expanders, it delivers a reliable system and a large range of options to extend the functionality of the system.

Ease of use

The Advisor Advanced system is designed for its "ease of use". The Advisor Advanced range offers easy menu access and menu browsing as well as quick-access to menu items. Hints are available to provide tips during configuration. The use of regular functions, such as set and unset, are designed to be intuitive to end-users.

Wireless and Wired sensor support

The Advisor Advanced system is a full hybrid system. It allows for connection of any combination of wired and wireless sensors.

Communication


Advisor Advanced provides flexible communication options, such as wireless communications, with or without IP on board or optional PSTN. The ATSx500A-IP platform has an integrated 10/100mb ethernet connection supporting IP reporting to OH-NETREC receiver and U/D functionality to ATS85x0.

Remote FW upgrade

Firmware upgrades can be performed using USB stick without need of a pc or remotely, reducing drastically the number of required site visits and therefore costs. (as of FW MR3.0)

Remote & mobile applications

More and more alarm system users connect their system to a

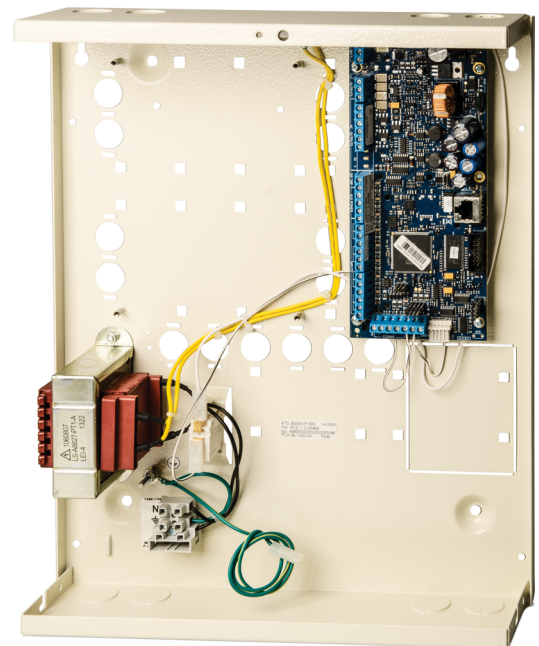

Dettagli

- 8 zone a bordo
- Fino a 128 zone: cablate, via radio o miste
- Espansioni ingressi ed uscite ad innesto
- Fino a 16 ingressi per sensori inerziali
- 8 aree
- Fino a 2000 utenti (dalla versione MR4.4). Massimo 65532 utenti con l'utilizzo del controllore di varchi/ascensori
- Certificata EN50131 grado 3
- Porta USB integrata per la programmazione locale
- Fino a 16 tastiere/lettori
- Fino a 15 DGP
- Combinatore PSTN ad innesto
- Multilingua: ogni utente la sua lingua
- Invio eventi in IP verso OH-NETREC e telegestione tramite GPRS
- Invio eventi in IP verso OH-NETREC e telegestione tramite GPRS
- Auto inserimento/disinserimento - Programmatore orario - Uscite temporizzate

professional alarm monitoring system. Alarm monitoring companies typically monitor alarm systems on a 24/7 basis, and may also provide other services, such as performing health check and remote servicing. The Advisor Advanced ATS85xx remote service software is built to equip monitoring operators with the tools to service multiple events and panels, and to help them improve service levels for professional customers.

End users can benefit from the ATS8600 Management solution, which integrated intrusion, access, video and fire in 1 software package. On top of this the end user can control their system via the mobile app supported for IOS and Android and receive push messages.

Integrated Access Control

All panels can control multiple doors and allow users to disarm alarm areas as access is granted. Advisor Advanced can be expanded with more thorough access control functionalities using the, complete backwards compatible door controller, ATS125x. This way 48 intelligent doors can be controlled through these optional 4-door controllers, that are connected on the RS485 bus.

UltraSync cloud solution

As of FW version MR4.0 all ATSX500A panels are supporting the UltraSync cloud solution. Users can benefit from the UltraSync connectivity services in order to connect from mobile apps, ATS85xx configuration software without having to configure the home router or having to know the public IP/DNS address of the panel.

ATS3500A-MM-HK-4IN

Kit ATS3500A-MM che include una tastiera ATS1135 e 4xATS1210E

Specifiche tecniche

Sistema

Linee prodotto	Advisor Advanced
Product type	Controllo accessi integrato
Tipo di centrale	Ibrido
Kit	Si
No. of keypads / readers	16
Data Gathering Panels (DGP)	15
Numero di gruppi di allarmi	64
Specified cable	WCAT52 WCAT54

Ingressi

No. Max di ingressi	128
Onboard inputs	8
Ingressi espansione plug-8 in	

Uscite

No. of outputs	128
Numero di uscite a bordo	5

Area

Numero di aree	8
----------------	---

Utente / carte

Max. no. of users	more than 2000
Utenti con nome	200
Max. no. of cards	200
Numero massimo di codici PIN	200

Controllo accessi

Porte standard in centrale	8
Door groups	128
Porte intelligenti su DGP a 4 porte	48

Comunicazione

Tipo di trasmissione a bordo	PSTN
Estensione di trasmissione	GSM, GSM/GPRS, GSM/GPRS/IP
Tipo di databus	RS485

Registro eventi

Registro degli eventi di allarme	1000
Accesso al registro degli eventi	10000

Elektrico

Tipo di alimentatore	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	1950 mA at 13.8 V
Max. corrente aux	1350 mA
Ripristino automatico dei fusibili	5
Glass break fuses	1

Fisico

Physical dimensions	315 × 388 × 85 mm
Materiale	Acciaio (verniciato)
Housing	Contenitore metallico medio

Ambientale

Operating temperature	-10 to +55°C
Relative humidity	95% (non-condensing)
Classe ambientale	Class II, indoor
IP rating	30

Regolatorio

Grado EN50131	Grado 3
Compliance	CE
Certificazioni	CE



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 10:31